

RAWLPLUG®

POWER TOOLS

**"RANGE OF CORDLESS
POWER TOOLS 18V**

with Li-Ion technology



COMPREHENSIVENESS, POWER AND EFFICIENCY



POWER TOOLS

RANGE OF CORDLESS POWER TOOLS

WITH LI-ION TECHNOLOGY

Strong and efficient lithium-ion Rawplug 18V batteries.

- Our large battery capacity enables long-term operation without unnecessary downtime.
- Lithium-ion technology allows you to fast charge the battery.
- Rawplug's 18V battery is used to power all power tools in the range.
- High-quality lithium-ion cells provide long-term and effective battery operation.
- The charge level indicator allows you to properly plan your working time.

RawCHARGER

Fast charger 18V 6,5A
R-CHR-186501



RawBATTERY

Li-Ion battery 18V 5.0Ah
R-BAT-185001



RawBATTERY

Li-Ion battery 18V 2.0Ah
R-BAT-182001

RawCHARGER

Charger 18V 1.5A
R-CHR-181501



RawHAMMER

Rotary hammer SDS-PLUS 18V
R-PRH18



RawWRENCH

Impact wrench 18V
R-PIW18



RawWRENCH

Impact driver 18V
R-PID18

RawDRIVER

Drill driver 18V
R-PDD18



RawDRIVER

Drywall screwdriver 18V
R-PDS18

RawGRINDER

Angle grinder 18V
R-PAG18



NEW

RawlBATTERY

BATTERY LI-ION 18V
R-BAT-185001 18V / 5,0 Ah
R-BAT-182001 18V / 2,0 Ah

The RawlBattery 18V batteries are standardised and extremely efficient power sources dedicated to the Rawlplug 18V series of power tools. Thanks to their refined electronic control systems and top-quality components, they stand out among similar solutions with their exceptional performance and reliability, offering long working times and trouble-free operation of power tools.

› **The use of one type of battery** for several devices increases the convenience of use and reduces costs

› For working with power tools in **high demand** electricity

› **Battery compatible** with all power tools and chargers from the Rawlplug 18V series



› The electronic **system for deep discharge protection** allows you to extend the battery life

› **The charge status** indicator allows you to optimally schedule work tim



› **Lightweight and compact dimensions** help to properly balance the power tool and improves ergonomics



APPLICATIONS

Designed for powering all cordless power tools of the Rawlplug 18V series

TECHNICAL PARAMETERS

Index	R-BAT185001
Battery voltage	18 V
Battery capacity	5,0 Ah
Power	90 Wh
Charge level indicator	YES

Index	R-BAT182001
Battery voltage	18 V
Battery capacity	2,0 Ah
Power	36 Wh
Charge level indicator	YES

OFFER

Battery LI-ION 18V, 5,0Ah
R-BAT-185001



Battery LI-ION 18V, 2,0Ah
R-BAT-182001



RELATED PRODUCTS

RawlHammer 18 V
R-PRH18



RawlWrench 18 V
R-PIW18



RawlDriver 18V
R-PDD18



RawlWrench 18V
R-PID18



RawlDriver 18V
R-PDS18



RawlGrinder 18V
R-PAG18



Charger 1,5 A
R-CHR-181501



Charger 6,5 A
R-CHR-186501



RawlHAMMER R-PRH18-XL2 ROTARY HAMMER SDS-PLUS 18V

› **Efficient electropneumatic impact mechanism** generating an energy of 2.0 J with a frequency of up to 4400 bpm allows for extremely effective drilling of holes up to 20 mm in diameter in concrete.

› **Electronic stop protection system** engages during jamming to protect the user and the power tool

› **4 functions** - drilling / hammer drilling / chiseling / positioning the chisel makes the rotary hammer an extremely versatile power tool

› **The SDS-plus tool shank** ensures full compatibility with a wide range of accessories available on the market and enables effective transfer of impact energy

› **Ergonomic mode selector** allows convenient and quick switching between power tool function

› **LED** illuminates the workplace to increase user's comfort and safety

› **Two Li-Ion batteries** with 5.0 Ah capacity and a 50 minute fast charger is included with the set to guarantee uninterrupted work

› **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



› **Powerful brushless motor** ensures high efficiency of the mechanism and increases the life time of the tool

› **Rubberised, profiled handle** increases grip and user ergonomics

› **Compact design and lightweight construction** reduces fatigue during long-term use



APPLICATIONS

- Drilling holes in concrete up to Ø 20 mm
- Drilling holes in wood up to Ø 22 mm
- Drilling holes in metal up to Ø 13 mm
- Façades and roofs thermal insulations



TECHNICAL PARAMETERS

Index	R-PRH18-XL2
Battery voltage	18 V
Battery capacity	5.0 Ah
Number of batteries included	2
Charging time	50 min
Tool holder	SDS - plus
Impact energy	2.0 J

Impact frequency	0 - 4400 bpm
Rotational speed	0 - 1200 rpm
Maximum drilling capacity:	
concrete	20 mm
wood	22 mm
metal	13 mm

EQUIPMENT

System box Rawlcase R-RC-4414	Rotary hammer SDS-PLUS R-RH-1801B	2 x Li-Ion batteries 18V 5.0Ah R-BAT-185001	Fast charger 18V 6.5A R-CHR-186501	Protection gloves R-PGL-01	Operating instructions
					

RELATED PRODUCTS

Concrete Screw Anchor R-LX-HF 	Stainless steel throughbolt R-HPTII-A4 	Universal nylon plug 4ALL 	Nylon Frame Fixings long expansion zone R-FF1-L 
Drill bits Rebardrill SDS-plus RT-SDSR 	Drill bits Aggressor SDS-plus RT-SDSA 	Drill bits Brickdrill SDS-plus RT-SDSB 	Hollow drill bits Dustlessdrill SDS-plus RT-SDSH 

RawlWRENCH R-PIW18-XL2 IMPACT WRENCH 18V




- > **The metal gear housing** facilitates cooling and increases power tool life-time
- > **Powerful impact gear** generating up to 1000 Nm allows the power tool to be used for the most demanding fixings applications
- > **Powerful brushless motor** ensures high efficiency of the mechanism and increases the life time of the tool
- > **1/2" square tool holder** for stable mounting of impact sockets
- > **LED** illuminates the workplace to increase user's comfort and safety
- > **Ergonomically positioned left / right rotation switch** allows a convenient and quick change between screwing and unscrewing
- > **Rubberised, profiled handle** increases grip and user ergonomics
- > **Electronic protection stop system** engages during jamming to protect the user and the power tool
- > **Two Li-Ion batteries** with 5.0 Ah capacity and a 50 minute fast charger are included with the set to guarantee uninterrupted work
- > **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



APPLICATIONS

- Installation of R-LX screws Ø 8-14mm
- Timber constructions: screwing screws up to Ø 24 mm
- Metal constructions: assembly of metric screws (up to M24)



TECHNICAL PARAMETERS

Index	R-PIW18-XL2
Battery voltage	18 V
Battery capacity	5.0 Ah
Number of batteries included	2
Charging time	50 min
Maximum torque	1000 Nm

Tool holder	1/2"
Rotational speed	0 - 1900 rpm
Impact frequenc	0 - 2800 bpm
Maximum bolt size	M24

EQUIPMENT

System box Rawlcase R-RC-4414	Impact Wrench R-IW-1801B	2 x batteries 18V 5.0Ah R-BAT-185001	Fast charger 18V 6,5A R-CHR-186501	Protection gloves R-PGL-01	Operating instructions
					

RELATED PRODUCTS

Concrete Screw Anchor R-LX-HF	Concrete Screw Anchor R-LX-I	Concrete Screw Anchor R-LX-H	Metric threaded rods R-STUDS
			
Throughbolt R-XPT	Impact sockets drive RT-IS		
			

RawlWRENCH R-PID18-XL2 IMPACT DRIVER 18V



- > **Drilling mode** enables efficient use in timber and wood-based materials
- > **Auto Stop Control ASC**, torque cut off mode prevents damage to the material surface during screwing
- > **Powerful brushless motor** ensures high efficiency of the mechanism and increases the life time of the tool
- > **Rubberised, profiled handle** increases grip and user ergonomics
- > **Multihed tool holder** - 1/4" hexagonal shank for bits and 1/2" square for sockets provides broad usability of the power tool
- > **Hook** for suspending the screwdriver on the belt, which facilitates work in places where it is not possible to put the tool down
- > **Compact design and lightweight construction** reduces fatigue during long-term use
- > **LED** illuminates the workplace to increase user comfort and safety
- > **Electronic adjustable torque** range to match power tool parameters for specific applications
- > **Two Li-Ion batteries** with 5.0 Ah capacity and a 50 minute fast charger are included with the set to guarantee uninterrupted work
- > **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



APPLICATIONS

- Timber constructions: Screwing screws up to Ø 14 mm
- Metal constructions: Assembly of metric screws (up to M14)
- Installation of R-LX concrete screws up to Ø 8 mm
- Frame pins and others up to Ø 14 mm (e.g. FF1, 4ALL)
- Sheet metal drilling up to Ø 10 mm x 2 mm thick
- Wooden constructions: Drilling in wood or chipboard (up to Ø 30 mm)



TECHNICAL PARAMETERS

Index	R-PID18-XL2
Battery voltage	18 V
Battery capacity	5.0 Ah
Number of batteries included	2
Charging time	50 min
Maximum torque	210 Nm

Tool holder	1/4" HEX / 1/2"
Rotational speed	0 - 1100 / 2600 / 3200 rpm
Impact frequency	0 - 1200 / 2700 / 3800 bpm
Maximum bolt size	M14

EQUIPMENT

System box Rawlcase R-RC-4414	Impact driver R-ID-1801B	2 x Li-Ion batteries 18V 5.0Ah R-BAT-185001	Fast charger 18V 6,5A R-CHR-186501	Protection gloves R-PGL-01	Operating instructions
					

RELATED PRODUCTS

Construction screw with cylinder head and double thread R-PCZ	Construction screw with countersunk head and partial thread R-PTX	Decking Screws R-DSX	Concrete Screw Anchor R-LX-CS
			
Impact screwdriver bits RT-IBIT-T	Bit holders RT-IBIT-ADAP	Impact sockets drive RT-IS	Flat drill bits RT-FLWD
			

RawlDRIVER R-PDD18-XL2 DRILL DRIVER 18V

➤ **16 + 1 positions of the clutch** allows optimal selection of torque for driving of bolts and screws of different sizes depending on the type of substrate

➤ **Compact design and lightweight construction** reduces fatigue during long-term use

➤ **The LED** illuminates the workplace to increase the user comfort and safety

➤ **Ergonomically positioned left / right rotation switch** allows a convenient and quick change between screwing and unscrewing

➤ **Two Li-Ion batteries** with 5.0 Ah capacity and a 50 minute fast charger are included with the set, to guarantee uninterrupted work

➤ **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport

➤ **Two gears** allow you to adjust the speed and torque to your job

➤ **Powerful brushless motor** ensures high efficiency of the mechanism which increases the life time of the power tool

➤ **Rubberised, profiled handle** increases grip and user ergonomics

➤ **The single-sleeve 13 mm drill chuck** makes it easy to install all accessories

➤ **Hook** for suspending the screwdriver on the belt, facilitates work in places where it is not possible to put the tool down



APPLICATIONS

Timber constructions: Screwing screws up to Ø 6 mm

Metal constructions: Assembly of metric screws (up to M6)

Frame pins and others up to Ø 14 mm (e.g. FF1, 4ALL)

Drilling in sheet metal with a thickness of 2 mm to 10 mm

Wooden constructions: Drilling in wood or chipboard (up to Ø 32 mm) or chipboard (up to Ø 32 mm)



TECHNICAL PARAMETERS

Index	R-PDD18-XL2
Battery voltage	18 V
Battery capacity	5.0 Ah
Number of batteries included	2
Charging time	50 min
Maximum torque	60 Nm

Number of clutch settings	16 + 1
Chuck	1.5 - 13 mm
Rotational speed 1st gear	0 - 550 rpm
Rotational speed 2nd gear	0 - 2000 bpm
Maximum drilling diameter in wood	Ø 36 mm
Maximum drilling diameter in metal	Ø 13 mm

EQUIPMENT

System box Rawlcase R-RC-4414	Drill driver R-DD-1801B	2 x Li-Ion batteries 18V 5.0Ah R-BAT-185001	Fast charger 18V 6,5A R-CHR-186501	Protection gloves R-PGL-01	Operating instructions

RELATED PRODUCTS

Construction screw with wafer head and partial thread R-PTK	Construction screw with countersunk head and full thread R-PVS	Universal nylon plug 4ALL	Nylon Frame Fixings long expansion zone R-FF1-L
Screwdriver bits RT-BIT-TORX	Bit holder RT-BIT-ADAP/2M	Bit holder RT-BIT-ADAP/QC	Auger bits RT-AWD

RawlDRIVER R-PDS18-M2A DRYWALL SCREWDRIVER 18V

Precise adjustment of the screw depth allows accurate assembly

Compact design and lightweight construction reduces fatigue during long-term use

Cover for selective screwdriving for precise work

Rubberised, profiled handle increases grip and user ergonomics

1/4" hexagonal tool holder for quick mounting of bits

Automatic screw feeder for serial screwdriving and faster work

The switch lock button for continuous operation improves ergonomics and speeds up work

Hook for suspending the screwdriver on the belt facilitates work in places where it is not possible to put the tool down

The RawlCase system allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



APPLICATIONS

- Drywall panels assembly: driving screws up to 57mm
- Metal profiles: Driving screws up to Ø 4.2mm
- Timber profiles: Driving screws up to Ø 4.2mm



TECHNICAL PARAMETERS

Index	R-PDS18-M2A
Battery voltage	18 V
Battery capacity	2.0 Ah
Number of batteries included	2
Charging time	60 min

Tool holder	1/4" HEX
Rotational speed	5000 rpm
Maximum screws diameter	2.5 - 4.2 mm
Maximum screws length	20 - 57 mm


EQUIPMENT

System box Rawlcase R-RC-4414	Drywall screwdriver R-DS-1801B	Automatic screw feeder R-PDS-AF1	2 x Li-Ion batteries 18V 2.0Ah R-BAT-182001	Charger 18V 1.5A R-CHR-181501	Protection gloves R-PGL-01
Operating instructions					

RELATED PRODUCTS

Drywall screws - timber R-FT	Drywall screws - metal R-FS	Screwdriver bits RT-BIT-PH2	Bit holder RT-BIT-ADAP/60

RawlGRINDER R-PAG18-XL2 ANGLE GRINDER 18V

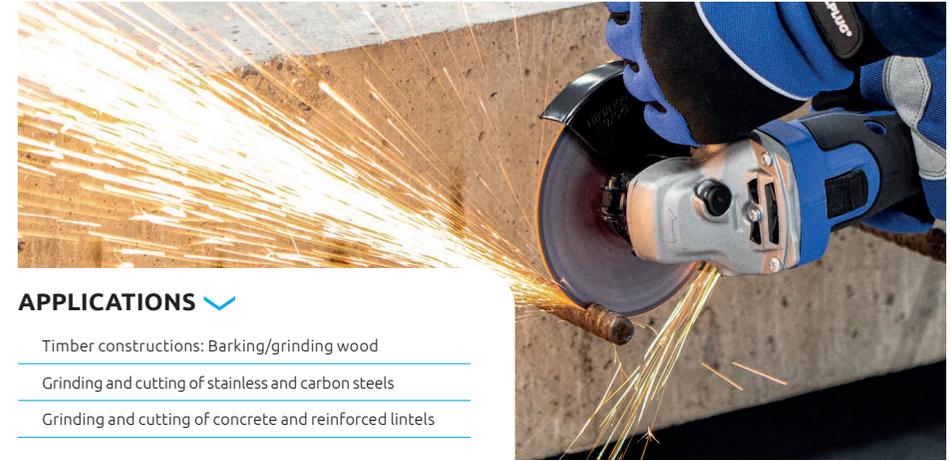

APPLICATIONS

- Timber constructions: Barking/grinding wood
- Grinding and cutting of stainless and carbon steels
- Grinding and cutting of concrete and reinforced lintels


TECHNICAL PARAMETERS

Index	R-PAG18-XL2	Charging time	50 min
Battery voltage	18 V	Disc diameter	125 mm
Battery capacity	5.0 Ah	Spindle diameter	22.2 mm
Number of batteries included	2	Rotational speed	8 500 rpm

EQUIPMENT

System box RawlCase R-RC-4414	Angle grinder R-AG-1801B	2 x Li-Ion batteries 18V 5.0Ah R-BAT-185001	Fast charger 18V 6,5A R-CHR-186501	Protection gloves R-PGL-01	Operating instructions
					

RELATED PRODUCTS

Diamond discs RT-DDT-125 	Diamond discs RT-DDB-125 	Diamond discs RT-DDC-125 	Diamond discs RT-DDE-125 
Cutting wheels RT-CDM-125/1 	Cutting wheels RT-CDI-125/1 	Cutting wheels RT-CDS 	Flap discs for grinding stainless steel RT-FDI 

➤ **Rubberised, profiled handle** increases grip and user ergonomics

➤ **Powerful brushless motor** ensures high efficiency of the mechanism and increases the life time of the tool

➤ **Compact design and lightweight construction** reduces fatigue during long-term use

➤ **High dust resistance** increases the life-time of the angle grinder

➤ **The electronic motor brake system** stops the disc as soon as the grinder is switched off for additional safe operation

➤ **A safety sliding switch** prevents unintentional starting of the machine

➤ **Disc guard** enables the assembly of diamond and corundum grinding wheels in diameter 125 mm

➤ **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



RawlCHARGER

CHARGER 18V
R-CHR-186501 18V / 6,5 A
R-CHR-181501 18V / 1,5 A

The charger is compatible with all power tools and batteries of the Rawlplug 18V series

› **6.5 A charging current**
 - charging parameters selected in terms of process speed and increasing the service life the battery

› **Battery cooling** - charger equipped in cooling system to increase the service life of battery while fast process charging



› **Fast charging** reduces downtime during operation

› **Clear control panel and easy operation** - charging process battery monitored electronically at every stage

› **Universality**
 - charger compatible with all power tools and batteries from the Rawlplug 18V series



› **Charging current 1.5 A**
 - charging parameters selected for speed process and increase battery lifetime



APPLICATIONS

Designed for use with all 18V Rawlplug batteries

TECHNICAL PARAMETERS

Index	R-CHR-186501
Charging voltage	18 V
Charging Current	6,5 A
Charging time battery 5,0 Ah	50 min

Index	R-CHR-181501
Charging voltage	18 V
Charging Current	1,5A
Charging time battery 2,0 Ah	40 min

OFFER

Charger
R-CHR-186501



Charger
R-CHR-181501



RELATED PRODUCTS

RawlHammer 18 V
R-PRH18



RawlWrench 18 V
R-PIW18



RawlDriver 18V
R-PDD18



RawlWrench 18V
R-PID18



RawlDriver 18V
R-PDS18



RawlGrinder 18V
R-PAG18




Battery LI-ION 18V 5,0Ah
R-BAT-185001



Battery LI-ION 18V 2,0Ah
R-BAT-182001



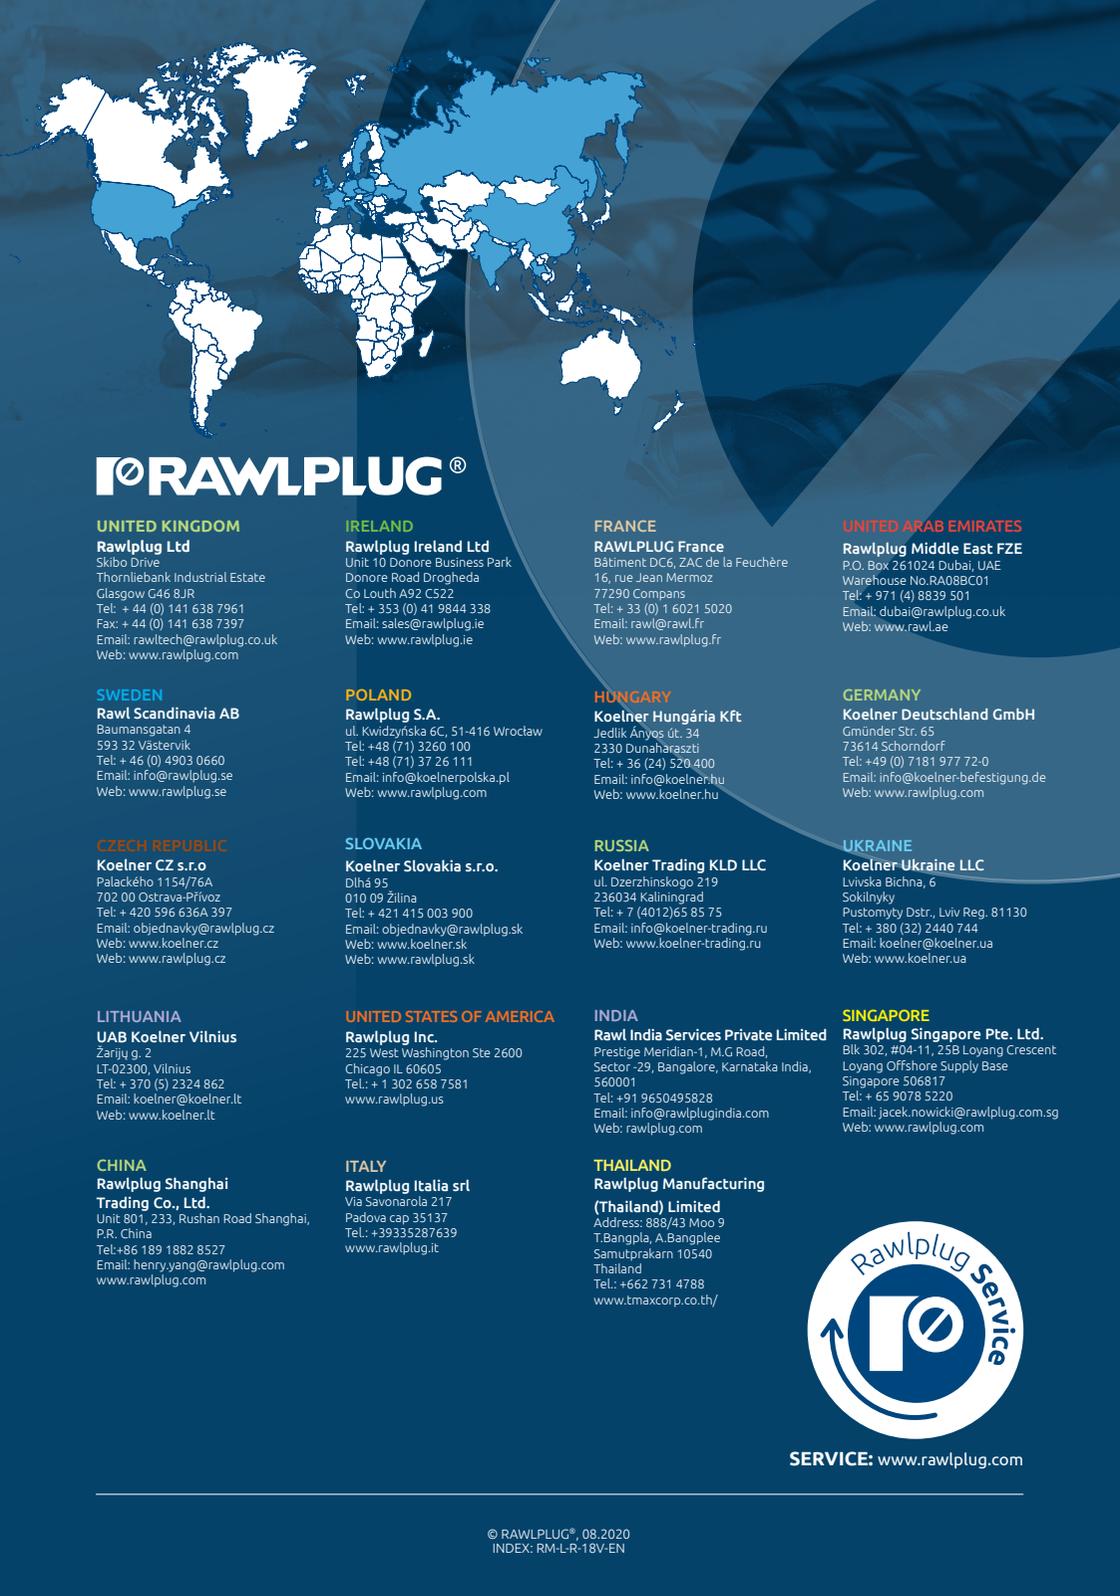

RAWLPLUG®

UNITED KINGDOM

Rawplug Ltd
Skibo Drive
Thornliebank Industrial Estate
Glasgow G46 8JR
Tel: +44 (0) 141 638 7961
Fax: +44 (0) 141 638 7397
Email: rawltech@rawlplug.co.uk
Web: www.rawplug.com

SWEDEN

Rawl Scandinavia AB
Baumansgatan 4
593 32 Västervik
Tel: +46 (0) 4903 0660
Email: info@rawlplug.se
Web: www.rawplug.se

CZECH REPUBLIC

Koelner CZ s.r.o.
Palackého 1154/76A
702 00 Ostrava-Privoz
Tel: +420 596 636A 397
Email: objednavky@rawlplug.cz
Web: www.koelner.cz

LITHUANIA

UAB Koelner Vilnius
Žarijų g. 2
LT-02300, Vilnius
Tel: +370 (6) 2324 862
Email: koelner@koelner.lt
Web: www.koelner.lt

CHINA

Rawplug Shanghai Trading Co., Ltd.
Unit: 801, 233, RUSHAN Road Shanghai, P.R. China
Tel: +86 189 1882 8527
Email: henry.yang@rawlplug.com
www.rawplug.com

IRELAND

Rawplug Ireland Ltd
Unit: 10 Donore Business Park
Donore Road Drogheda
Co Louth A92 C522
Tel: +353 (0) 41 9844 338
Email: sales@rawlplug.ie
Web: www.rawplug.ie

POLAND

Rawplug S.A.
ul. Kwidzińska 6C, 51-416 Wrocław
Tel: +48 (71) 3260 100
Tel: +48 (71) 37 26 111
Email: info@koelnerpolska.pl
Web: www.rawplug.com

SLOVAKIA

Koelner Slovakia s.r.o.
Dlhá 95
010 09 Žilina
Tel: +421 415 003 900
Email: objednavky@rawlplug.sk
Web: www.koelner.sk
Web: www.rawplug.sk

UNITED STATES OF AMERICA

Rawplug Inc.
225 West Washington Ste 2600
Chicago IL 60605
Tel: +1 302 658 7581
www.rawplug.us

ITALY

Rawplug Italia srl
Via Savonarola 217
Padova cap 35137
Tel.: +39335287639
www.rawplug.it

FRANCE

RAWLPLUG France
Bâtiment DC6, ZAC de la Feuchère
16, rue Jean Mermoz
77290 Comrans
Tel: +33 (0) 1 6021 5020
Email: rawl@rawl.fr
Web: www.rawlplug.fr

HUNGARY

Koelner Hungária Kft
Jedlik Ányos út. 34
2330 Dunaharaszti
Tel: +36 (24) 520 400
Email: info@koelner.hu
Web: www.koelner.hu

RUSSIA

Koelner Trading KLD LLC
ul. Dzerzhinskogo 219
236034 Kaliningrad
Tel: +7 (4012)65 85 75
Email: info@koelner-trading.ru
Web: www.koelner-trading.ru

INDIA

Rawl India Services Private Limited
Prestige Meridian-1, M.G Road,
Sector-29, Bangalore, Karnataka India,
560001
Tel: +91 9650495828
Email: info@rawlplugindia.com
Web: rawlplug.com

THAILAND

Rawplug Manufacturing (Thailand) Limited
Address: 888/43 Moo 9
T.Bangpla, A.Bangplee
Samutprakarn 10540
Thailand
Tel.: +662 731 4788
www.tmaxcorp.co.th/

UNITED ARAB EMIRATES

Rawplug Middle East FZE
P.O. Box 261024 Dubai, UAE
Warehouse No.RA08BC01
Tel: +971 (4) 8839 501
Email: dubai@rawlplug.co.uk
Web: www.rawl.ae

GERMANY

Koelner Deutschland GmbH
Gmünder Str. 65
73614 Schorndorf
Tel: +49 (0) 7181 977 72-0
Email: info@koelner-befestigung.de
Web: www.rawplug.com

UKRAINE

Koelner Ukraine LLC
Lvivska Bichna, 6
Sokilnyky
Pustomyty Dstr., Lviv Reg. 81130
Tel: +380 (32) 2440 744
Email: koelner@koelner.ua
Web: www.koelner.ua

SINGAPORE

Rawplug Singapore Pte. Ltd.
Blk 302, #04-11, 25B Loyang Crescent
Loyang Offshore Supply Base
Singapore 506817
Tel: +65 9078 5220
Email: jacek.nowicki@rawlplug.com.sg
Web: www.rawplug.com



SERVICE: www.rawplug.com