



RAWL



TORAWLPLUG®









R-CFS+ KERII + R-STUDS 6-7

R-KERII 8-9



R-WBT-61

R-LX-HF-A4

Concrete Screws

Concrete Screwbolts

10-11

12-13

R-CBS-45 R-CBS-45-A2



Concrete Throughbolts

R-HPTIII-A4 14-15

Façade Fixings

16-17

KI-10N 18-19

R-TFIX-8S 20-21

Steel Façade Fixings

MBA MBA-SS 22-23

Frame Fixings

R-FFS-K-A4 24-25

R-FF1-N-K-A4 26-27



Self-Drill Screws

28-29

30-31

R-PH-HG

R-PH-LG

OCS-48 OCS-55 R-OCS-63 34-35

36-37 OCS-55/63

ONS-55

R-WX-48T R-WX-48T-A4 R-WX-55T-A4 40-41

Spreader Washers

R-KC-60 42-43



KWL-090PP 44-45



Steel Spreader Washers

MKC MKC-SS



32-33

38-39

R-POK-ALZN R-POK-06-ALZN R-RSW-85-SS 48-49







46-47

Resin Extrusion Tools

Drill Adapter 50-51 **Extrusion Tool**



Rawlplug CFS+ System

CFS+ is Rawlplug's tribute to our natural environment, without compromising on quality

Our portfolio of bonded anchors from the cartridge-free system are known for extensive certification (LEED, VOC, hygiene certification), durability and versatility (suitable for cracked and non-cracked concrete), and are proven solutions that make work easier.



RAWLPLUG® patended cartridge-free system (CFS+) comes ready to use in a self-opening foil container

This minimises waste and is ideal for projects requiring large amounts of anchors, and is why its extremely popular with industry professionals.

Chemicals are mixed together and a mineral additive is introduced. The ready-mixed resin is then blended and transferred into foil casings ready for use - a fully automated process conforming to strict health & safety regulations.

See page 9 for applications

Code	Туре	Size	Quantity
CFS+KERII-600 + R-STUDS	Foil	600ml	1

Pair with R-CFS+KERII 600ml Foil Gun



Code	Туре	Size	Quantity
R-CFS+KERII	Foil	600ml	1









ETA-21-0242 | UKTA 0836-22/6130

Eire Sold Stranger





















6

600m/

Rows Resin with Threaded Roas

90% Less Plastic

drill bits

Concrete

C20/25 - C50/60

Coolication in cracked and With boll of Service Life

with hollow core

of Service Life

Rawlplug R-KERII **Bonded Anchor**

Hybrid high performance vinylester resin

- Option 1 ETA approved resin system
- Approved for use in cracked and non-cracked concrete
- Suitable for use in wide temperature range
- Suitable for use in dry, wet and submerged substrates
- Excellent chemical resistance (durable in alkaline and sulphurous conditions
- Multiple uses (continue partly used cartridge with new nozzle)
- Wide range of applications (used in conjunction with the R-STUDS range, M8-M30). Variation of length and material finishes to suit substrate build-up

Applications

- Pipeline systems
- · Seismic strengthening and bracing of reinforced concrete buildings
- Cable conduits and travs
- Steelwork
- Rebar doweling
- Starter bars
- Curtain walling
- Cladding restraints

- Heavy machinery
- Handrails
- Safety barriers
- Racking systems
- Canopies
- Platforms
- Street lamps
- Passenger lifts
- Balustrading
- Formwork support systems

Code	Туре	Size	Quantity
R-KER-II-300	Cartridge	300ml	1
R-KER-II-400-UK	Cartridge	400ml	1









ETA-21-0242 | UKTA 0836-22/6130

















2 517es

Rawlplug R-KERII

RERI

Resin

Resin

Result

Re

400 ml

of Service Life

Option 1 ETA Approved


with hollow core

drill bits

Concrete

C20/25 - C50/60

Contraction in cracked and Approval for use Up to 100 Years of shelf life with boll of Service Life

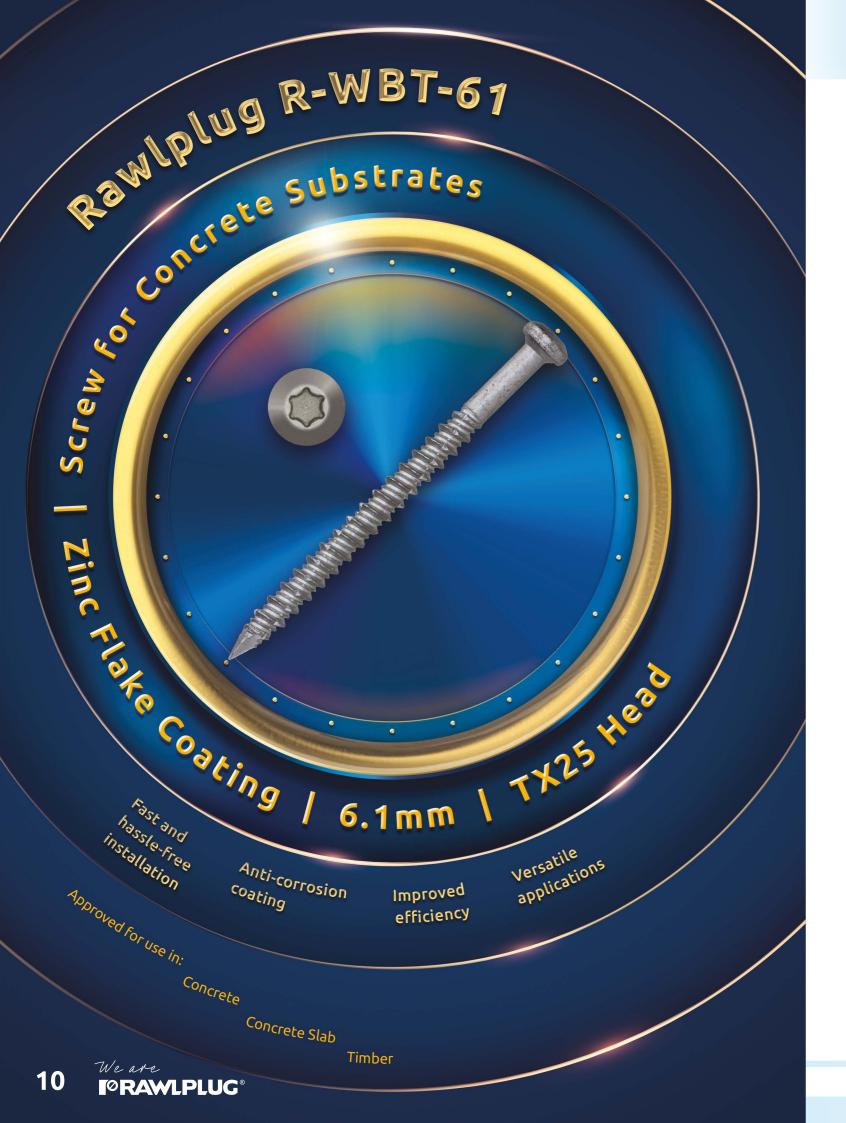

Rawlplug R-WBT-61 Concrete Screw

Screw for concrete substrates, specially designed to allow connecting to concrete and wood

- Hardened thread surface
- High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- Specially designed thread for connecting to concrete & wood
- Sharp drill point prevents surface movement

Applications

- Insulation materials in flat roof applications in conjunction with telescopic connector and steel washer
- Soffit liner insulation to concrete and hollow core slabs

Code	Length <i>mm</i>	Quantity	Code	Length <i>mm</i>	Quantity
6.1mm Drill Size			Continued		
R-WBT-61050	50	100	R-WBT-61H180	180	100
R-WBT-61075	75	100	R-WBT-61200	200	100
R-WBT-61090	90	100	R-WBT-61220	220	100
R-WBT-61100	100	100	R-WBT-61240	240	100
R-WBT-61120	120	100	R-WBT-61260	260	100
R-WBT-61140	140	100	R-WBT-61300	300	100
R-WBT-61160	160	100	R-WBT-61350	350	100
R-WBT-61H160	160	100	R-WBT-61400	400	100
R-WBT-61180	180	100			



Code	Price & Availability per Enquiry
R-KCX-155-A2	Please contact your Area Sales Manager
D KCA 322 V3	or call 0141 638 7961

ETA-09/0346 | UKTA-22/6338





















Anchor Range For Helping Hand Brackets To Concrete & Masonry

Rawlplug R-LX-HF-A4 Concrete Screwbolt

R-LX-HF-A4 Hex with flange concrete screw anchor

- A4-316 Stainless Steel for best corrosion resistance
- Time-efficient installation through streamlined procedure, simply drill and drive
- Completely removable with possibility of reuse
- Unique design with patented threadform ensures high performance for relatively small hole diameter
- Non-expansion functioning ensures low risk of damage to base material and makes R-LX ideal for installation near edges and adjacent anchors
- Oversize head for fixtures with elongated holes
- High performance in both uncracked and cracked concrete

Applications

- Through-fixing
- Fire brackets to concrete

Code	Drill Size mm	Length <i>mm</i>	Quantity
6.3mm			
R-LX-05X045-HF-A4	5.0	45	50





























Rawlplug R-LX-HF-Aq
Rawlplug R-LX-HF-Aq

Patented Threadforms.

High Performs.

Excellent for temporary

Unreinforced

Concrete

fixing

Reinforced

Concrete

Versatile

applications

High Performance

Natural Stone (After site testing)

R=LX=1000 Concrete screwbolk

Concrete Throughbolt Anchor

Anchor Range For Helping Hand Brackets To Concrete & Masonry

Rawlplug R-HPTIII-A4 Throughbolt Anchor



A new generation of R-HPTIII band anchors with variable embedment depths

- Option 1 Cracked Concrete Approved
- Suitable for cracked & non-cracked concrete C20/25 C50/60
- Fire resistance R30-R120
- Corrosion class C1 C5
- Short distances between anchor and concrete edge
- Decreased displacement under influence loads
- Can be used to fasten steel, aluminium and wood elements
- Newly shaped expansion band with additional lock
- Innovative ring at the end of headband provides excellent connection between anchor and ground

Applications

- Ventilated facades
- Barriers and railings
- Steel structures
- Curtain walls

- Heavy equipment
- Fences and gates
- Passenger lifts and platforms
- Stadium seats

Code	Drill Size	Length mm	Quantity
R-HPTIIIA4-12115/40	M12	115	50
R-HPTIIIA4-12125/50	M12	125	50

Extended range of M8, M10 & M12 available









ETA-21/1082 Pending











Hammerset insulation fixing with reinforced plastic nail

- The plastic nail reduces heat transmission (value 0.0W/K)
- Plastic nail reinforced with glass fibre allows fast and trouble-free installation with correct plug expansion
- Expansion zone designed for low embedment depths, reducing the amount of drilling required
- Optimal product parameters makes it a cost-saving solution
- Optimal plate stiffness ensures stability and excellent pull-over values

Applications

- Polystyrene boards
- Mineral wool (MW) boards
- Light wood wool buildings boards
- Polyurethane boards
- Wood fibre boards
- Lightweight recycled panels
- External Thermal Insulation Composite Systems (ETICS)

Code	Drill Size mm	Length <i>mm</i>	Fixture Thickness mm	Quantity
60mm Plate I	Diameter			
KI-070	10	70	35	250
KI-090	10	90	55	250
KI-120	10	120	85	250
KI-140	10	140	105	250
KI-160	10	160	125	250
KI-180	10	180	145	250
KI-200	10	200	165	250
KI-220	10	220	185	250
























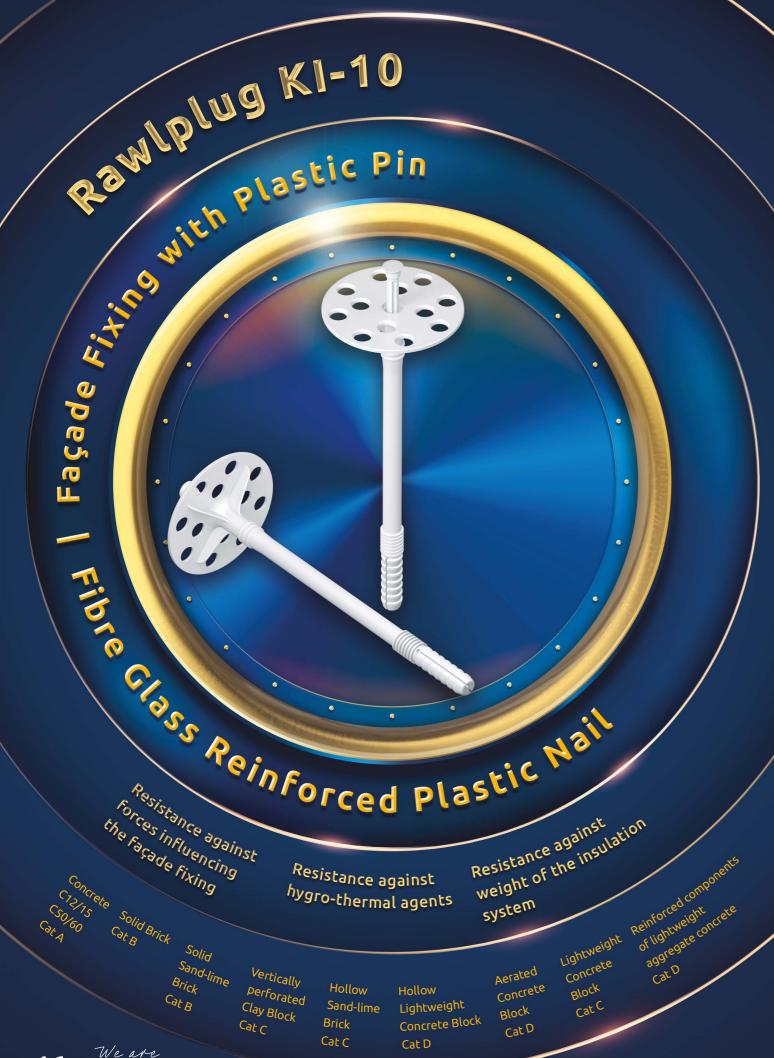



Long expansion zone hammer-in façade fixing with metal pin

- Easy installation with best performance in lightweight base materials
- Approved for use in base material categories B,C,D,and E
- Steel nail allows fast and trouble-free installation with correct plug expansion
- Reduction of thermal bridge formation (value 0.3W/K) through the integration of an impact-resistant plastic over-moulding on the nail head
- Plate stiffness (value 0.5 kN/mm) ensures smooth elevation surface and stable insulation system
- Can be used with additional KWL insulation holding plate, available in 90, 110 and 140mm flange sizes

Applications

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Light wood wool building boards
- Polyurethane (PU) boards
- Lightweight recycled panels


Code	Drill Size mm	Length mm	Fixture Thickness mm	Quantity
60mm Plate D	iameter			
KI-120N	10	120	60	250
KI-140N	10	140	70	250
KI-160N	10	160	90	250
KI-180N	10	180	110	250
KI-200N	10	200	130	250
KI-220N	10	220	150	250
KI-260N	10	260	190	200
KI-300N	10	300	210	200

ETA-07/0221 | UKTA-22/6343


















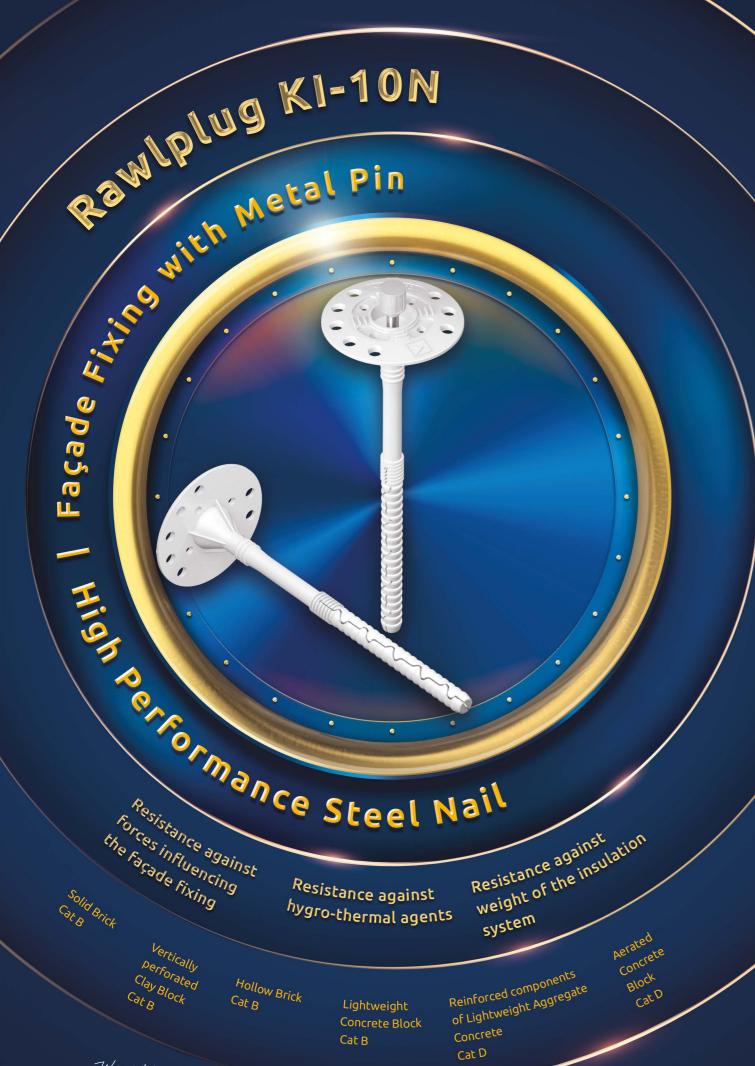



Rawlplug R-TFIX-8S Universal Façade fixing

Versatile screw-in façade fixing with high performance in all base materials recommended for ETICS

- Quick and easy installation in all substrates (categories A,B,C,D,E)
- Unique sleeve compression zone for precision installations
- The long plastic over-moulding on the R-TFIX-8S screw minimises thermal bridging (value 0,001-0,002W/K), contributing to energy-saving benefits
- Plate stiffness (value 0.6 kN/mm) ensures smooth elevation surface and stable insulation system
- Unique design allows for high load-bearing capacities. This reduces the quantity of fixings required per square metre of insulation
- The shortest embedment depth at the maxi mum strength parameters
- Pre-assembled screw saves time and labour

Applications

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Polyurethane (PU) boards
- Cork boards
- Light wood wool building boards

Price & Availability per Enquiry

Please contact your Area Sales Manager or call 0141 638 7961






















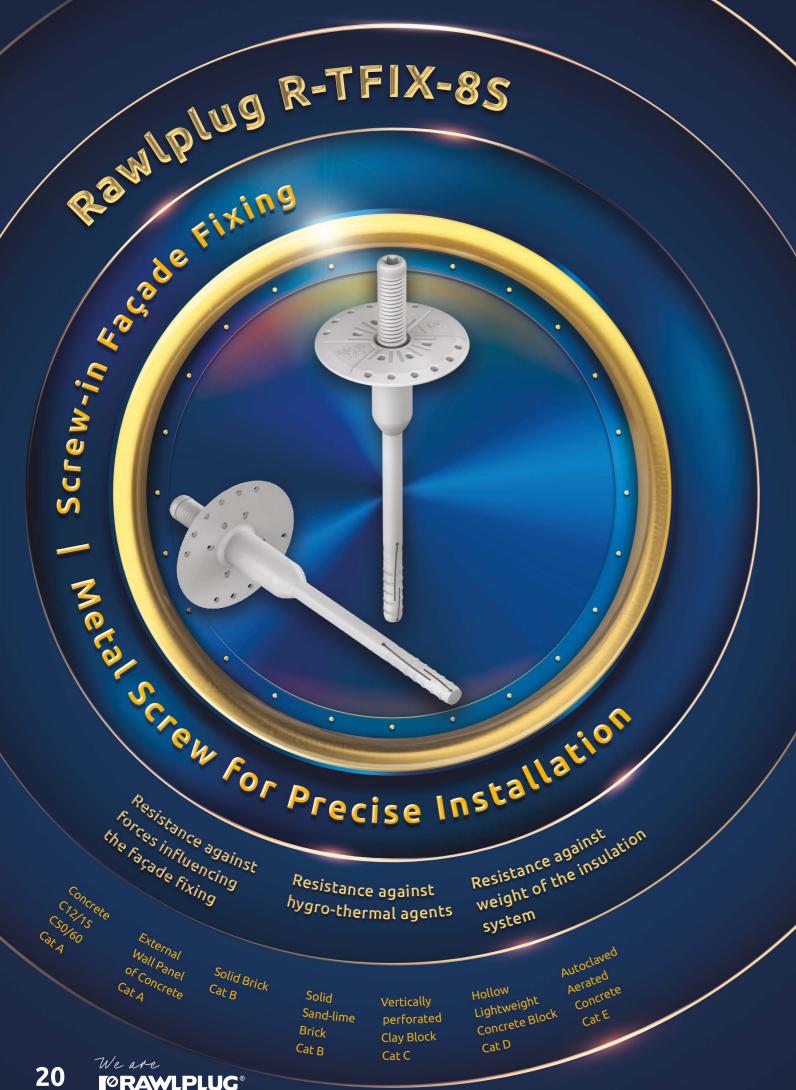

Rawlplug MBA & MBA-SS Steel Façade fixing

Fire-resistant stainless steel insulation fixing

- Metal facade fixing, recommended for use when fire resistance (F120) is a requirement
- Stainless steel (MBA-SS) material for high corrosion resistance
- Fast and simple hammer-set installation reduces working times
- Extensive dimensional range allows anchorage of insulation boards up to 250mm thick
- Accessory spreader plate, MKC-SS (85mm diameter) also available for installation of soft insulation materials such as mineral wool

Applications

- Mineral wool (MW) boards
- Glass wool
- Lightweight wood wool building boards
- Lightweight recycled panels
- Polystyrene (EPS) boards
- Polyurethane (PU) boards

Carbon Steel Zinc		Stainless Steel			
Maximum Insula	tion of 270	nm)	Maximum Insulat	ion of 370r	nm
Code	Length mm	Quantity	Code	Length <i>mm</i>	Quantil
40mm Plate Dia	meter		40mm Plate Dian	neter	
8mm Drill Size			8mm Drill Size		
MBA-08090	90	250	MBA-SS-08090	90	250
MBA-08110	110	250	MBA-SS-08110	110	250
MBA-08140	140	250	MBA-SS-08140	140	250
MBA-08170	170	250	MBA-SS-08170	170	250
MBA-08200	200	250	MBA-SS-08200	200	250
R-MBA-08210	210	250	MBA-SS-08250	250	125
R-MBA-08230	230	250	MBA-SS-08300	300	125
MBA-08250	250	125	MBA-SS-08330	330	125
MBA-08300	300	125	MBA-SS-08370	370	125
			MBA-SS-08400	400	250









ITB-KOT-2018/0721







requiring R120

Approved for use in:
Concrete C20/25 - C50/60

Rawlplug MBA & MBA-SS

Fire-Resistant Stainless Steel | Steel | Steel | Anti-Corrosion Anti-Corrosion Finish

fixing lengths

Solid Brick

Solid Sand-lime Brick

finish

Aerated Concrete Block

A Cook Fixing

Rawlplug R-FFS-K-A4 Frame Fixing

Universal solution for all applications

- Shortest anchoring depth only 40/50mm
- Made from A4 stainless steel for outdoor use
- Specially formulated nylon for best performance in all base material categories according to ETAG 020 (A,B,C,D)
- Internal plug geometry designed to fit the screw head
- Plug design ensures multi-axis expansion
- · Collard plug for fixing of hard materials eg. steel

Applications

- Ventilated facades
- Door & window frames
- Garage doors
- Gates
- Industrial doors
- Facade (substructures made of wood & metal)
- Wall cabinets
- Satellite dishes
- Shelves
- Handrails
- Cable trays











ETA-18/0818














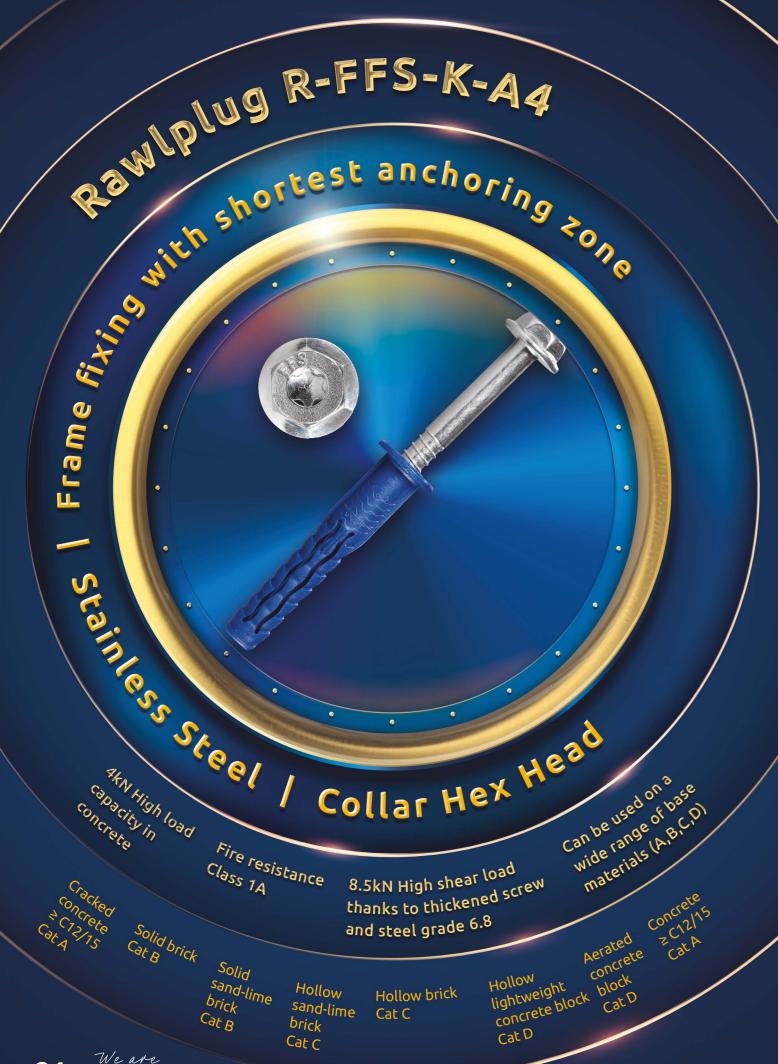

Rawlplug R-FF1-N-K-A4 Frame Fixing

Universal solution for all applications

- Stainless steel screw is best for anti-corrosion and external applications
- Collared plug for fixing of hard materials eg. steel
- Specially formulated nylon for best performance in all base material categories according to ETAG 020 (A,B,C,D)
- Internal plug geometry designed to fit the screw head
- Plug design ensures multi-axis expansion

Applications

- Door & window frames
- Garage doors
- Gates
- Industrial doors
- Facade (substructures made of wood & metal)
- Wall cabinets
- Satellite dishes
- **Shelves**
- Handrails
- Cable trays

Code	Drill Size	Plug Length mm	Quantity
R-FF1-N-10K080-A4	M10	80	50
R-FF1-N-10K100-A4	M10	100	25


























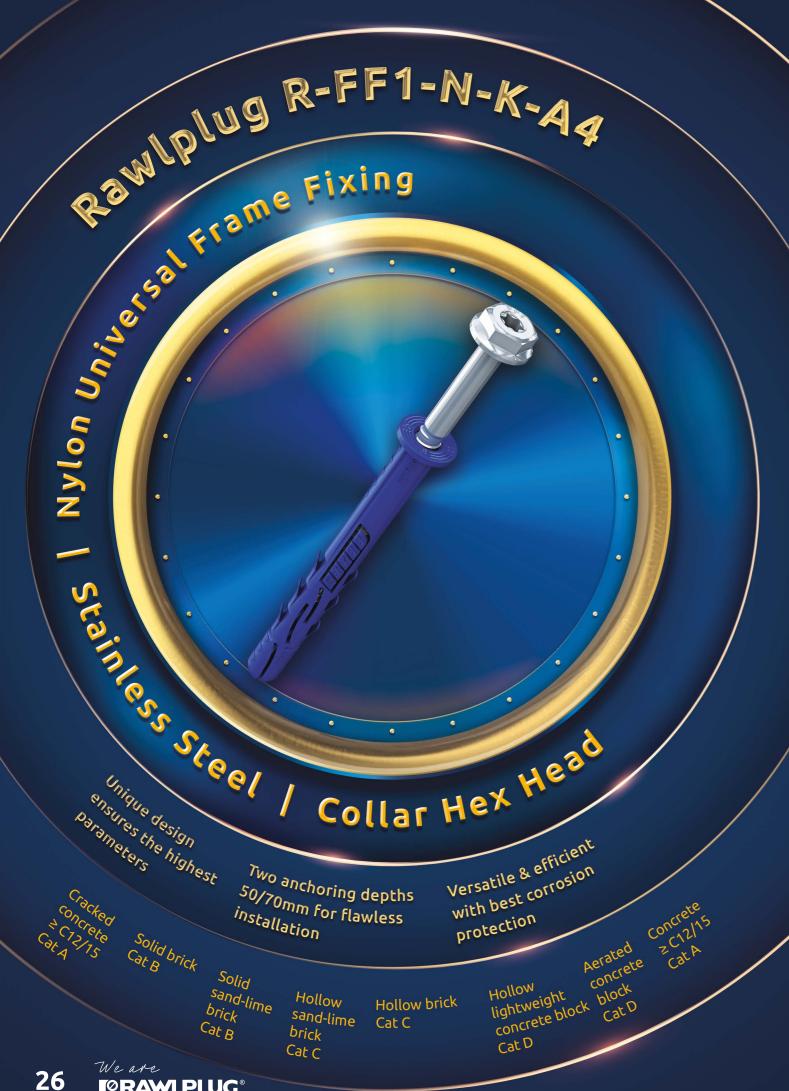

Rawlplug R-CBS-45 & R-CBS-45-A2 Self-Drill Screws

R-CBS-45 cement board screw for light steel frame & timber

- Carbon steel with hardened drill point
- Silver ruspert >500Hr salt spray test
- Minimum torque: 4.3Nm
- Hi-Lo thread

Applications

- Gypsum & cement boards to LSF/SFS and timber
- Intumescent fire barriers to OSB / plywood / sheathing and render boards

Carbon Steel with Ruspert Coating					
Code	Length <i>mm</i>	Quantity			
4.5mm					
R-CBS-45032	32	200			
R-CBS-45042	42	200			
R-CBS-45062	62	200			

R-CBS-45-A2 cement board screw for aluminium, sheathing boards & timber

- Stainless carbon steel with hardened drill point
- 5 micron coating + clear passivate
- Minimum torque: 2.9Nm
- Hi-Lo thread

Applications

- Gypsum & cement boards to aluminium and timber
- Intumescent fire barriers to OSB / plywood / sheathing and render boards

TIE 30 T BITTLE T Ruspere coucing		
Code	Length <i>mm</i>	Quantity
4.5mm		
R-CBS-45032-A2	32	200
R-CBS-45042-A2	42	200
R-CBS-45062-A2	62	200

A2-304 BIMETAL + Ruspert Coating













R-CBS-45-A2

Stainless Steel

Rawlplug R-CBS-45 /A2

identified in the substrates substrates

Carbon Steel

Ruspert



Rawlplug R-CWT-LG & R-CWTS-LG Csk Wing-Tip Self-Drill Screws

R-CWT-LG & R-CWTS-LG (4.8mm & 5.5mm) countersunck wing-tip self-drill screws <3.5mm steel thickness

- For sheathing boards to steel frame
- Wings are designed to help when drilling into thicker or more heavy-duty materials like metal
- Wings help enlarge the hole to provide an easier path for thread and rest of the screw to follow

Steel Thickness	Ultimate Pullout Value	
mm	kN	
1.0	1.14	
1.5	2.02	
2.0	3.04	
2.5	4.15	
3.0	5.27	

Carbon Steel with Ruspert Cod		ating
Code	Length <i>mm</i>	Quantity
4.8mm		
R-CWT-48038-LG	38	200
R-CWT-48045-LG	45	200

A2-304 BIMETAL + Ruspert Coating		
Code Length Quantity		
4.8mm		
R-CWTS-48038-LG	38	200













30

Saves time

Screws.


R-CWT-LG/CW75.1cc

Popular Countersunk Silvers Countersunk

Improved efficiency

Anti-corrosion For durability

Versatile applications

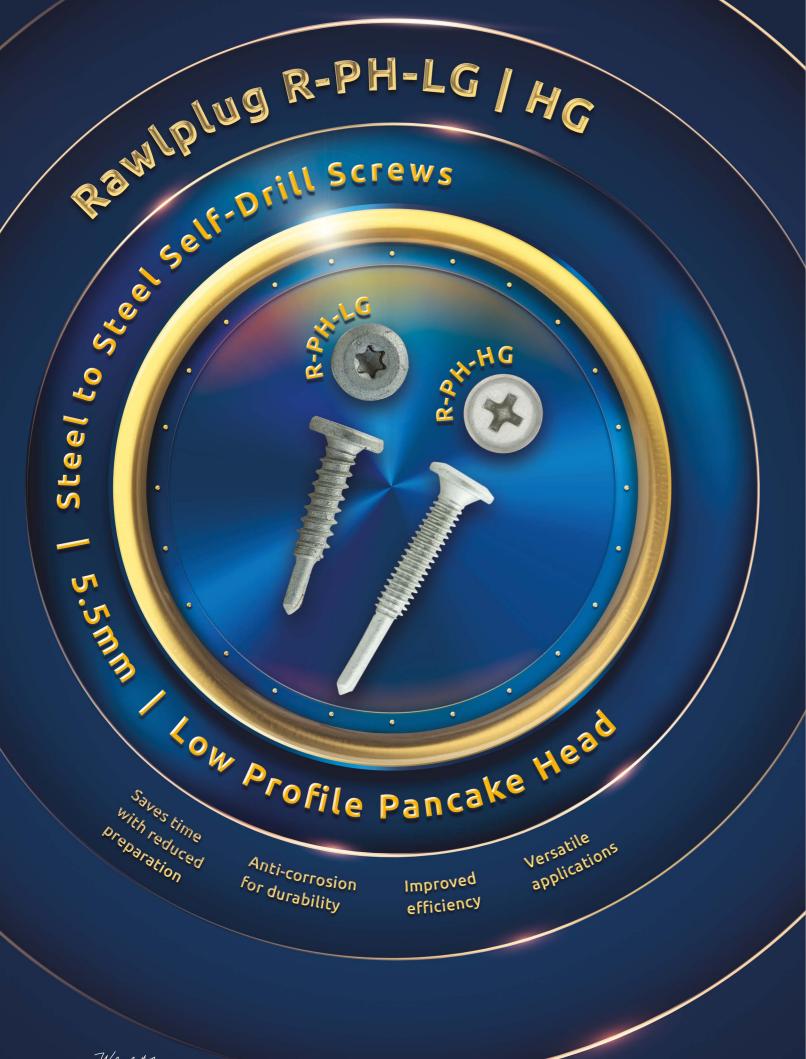

Rawlplug R-PH-LG & HG Self-Drill Screws

R-PH-LG (5.5mm) low profile pancake head self-drill screws, <3.5mm steel thickness, carbon steel ruspert & A2-304 bi-metal


Code	Length mm	Quantity
5.5mm		
R-PH-55019-LG	19	250
R-PH-55025-LG	26	250
A2-304 BIMETAL + R	Ruspert Coal	ting
D-DH-55025-I C-A2	26	250

Steel Thickness	Ultimate Pullout Value
mm	kN
1.0	1.25
1.5	2.25
2.0	3.50
2.5	4.50
3.0	6.10

R-PH-HG (5.5mm) low profile pancake head self-drill screws, <12.5mm steel thickness, carbon steel ruspert

Code	Length <i>mm</i>	Quantity
5.5mm		
R-PH-55038-HG	38	250

Steel	Ultimate
Thickness	Pullout Value
mm	kN
4.0	7.80
6.5	8.10
10.0	9.20
12.0	9.20





New

R-LP-A2 Low Profile Head with TX25 Internal Drive



A2-304 BIMETAL + Ruspert Coating		
Code Length Quantity		
5.5mm		
R-LP-55025-A2	26	200









Rawlplug R-OCS-48|55|63

Self-Drill Screws

R-OCS 4.8, 5.5, 6.3mm hex head self-drill screws <3.5mm steel thickness | carbon steel ruspert & A2-304 stainless steel bi-metal

- Hardened surface of the thread (flexible core)
- Corrosion resistant zinc coating
- The shape of the thread and its height is closely related to the intended use of self drilling fixing into steel construction
- The drill bit is designed to provide quick and trouble-free installation to steel
- Sharp pointed drill prevents surface movement
- Self vulcanizing EPDM washer temperature and UV resistant, the special shape of the washer ensures proper seating of the sealing material on the outer cladding material fixture which quarantees a proper seal



Steel Thickness	Ultimate Pullout Value
mm	kN
1.0	1.25
1.5	2.25
2.0	3.50
2.5	4.50
3.0	6.10

Without Washer		
Code	Length mm	Quantity
4.8mm		
OCS-48019	19	200
5.5mm		
OCS-55025	25	200
OCS-55038	38	200
OCS-55050	50	100
OCS-55070	70	100
6.3mm NEW Gre	ater Shear	r Capacity
R-OCS-63038	38	100
R-OCS-63050	50	100

With EPDM Washer		
Code	Length <i>mm</i>	Quantity
4.8mm		
OCS-48019S16	19	200
5.5mm		
OCS-55025S16	25	200
OCS-55038S16	38	200
OCS-55050S16	50	100









ETA-10/0183 according to EAD 330046-01-0602 | UKTA-22/6336







Saves time

Approved for use in:

R-OCS-48/55/63

Metal Sheet & Profiles

Improved

efficiency

Anti-corrosion

for durability


Structural Steel

New 6.3mm shear for greater shear

capacity

Steel to Ste

Rawlplug OCS-55/63 6.3mm Self-Drill Screws for Metal Sheets



Stainless steel self drilling screw with special drill bit shape designed to provide quick installation in metal constructions made from cold formed sections

- Hardened surface of the thread (flexible core)
- Corrosion resistant zinc coating
- The shape of the thread and its height is designed for applications into sandwich panels and steel construction
- Two types of threads: one designed for mounting into a steel structure, second under head thread, prevents external panel dents and helps to seal the connection
- Sharp drill point prevents surface movement

Applications

- Profiled and cover sheets
- Roofs
- Ventilated façades



Code	Length <i>mm</i>	Quantit
6.3mm		
OCS-55/63090	90	100
OCS-55/63110	110	100
OCS-55/63130	130	100
OCS-55/63150	150	100
OCS-55/63170	170	100
R-OCS-55/63200	200	100
OCS-55/63230	230	100
R-OCS-55/63270	270	100
R-OCS-55/63300	300	100

Carbon Steel, Anti-Corrosion		
Code	Length <i>mm</i>	Quantit
6.3mm		
R-OC-55/63080G16	80	100
R-OC-55/63105G16	105	100
R-OC-55/63135G16	135	100
R-OC-55/63150G16	150	100







ETA-13/0453 | UKTA-22/6409











Approved for use in:

Corrosion resistant

Metal Sheet & Profiles

Rawlplug OCS-55/63

Stainless Steel Kor 6mm max Composite of Samples she of Gamma Steel sh

Saves time

with reduced preperation

Hardened

thread surface

greater shear

screws

Rawlplug ONS-55 Stainless Steel Self-drill Screws

Stainless steel self-drilling screws with special drill bit shape designed to provide quick and trouble-free installation in metal constructions made from hot rolled sections

- Stainless steel self drilling screw made with BIMETAL
- Hardened surface of the thread (flexible core)
- Corrosion resistant zinc coating minimum 12um
- The shape of the thread and its height is designed for applications into sandwich panels and steel construction
- Sharp drill point prevents surface movement
- Self vulcanizing EPDM washer temperature and UV resistant, the special shape of the washer ensures proper seating of the sealing material on the outer cladding material fixture which guarantees a proper seal

Applications

• Supporting and cladding metal sheet to steel structures on façades or flat roof construction

Without Wash	her	
Code	Length <i>mm</i>	Quantity
5.5mm		
ONS-55040	40	200

With EPDM Washer		
Code	Length <i>mm</i>	Quantity
5.5mm		
ONS-55040S16	40	200









ETA-10/0183 | UKTA-22/6336











Saves time

Approved for use in:

5.5mm/

RawlPlug ONS-55

Steel to Ste

Het Head | A2 Bi-Meta

Improved efficiency

Anti-corrosion

For durability

Structural Steel

Versatile applications


Rawlplug R-WX-48T | 55T

Self-Drill Screws for Steel

- Screw for trapezoidal steel sheet <1.5mm
- Hardened thread surface • High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- Specially designed to allow connecting to metal sheets
- Sharp drill point prevents surface movement
- Reduced drilling point ensures optimal tightness and correct hole diameter in thin metal sheets
- Possible pre-assembly with other components

Applications

• Insulation layers on flat roofs together with a appropriate telescopic or steel washer

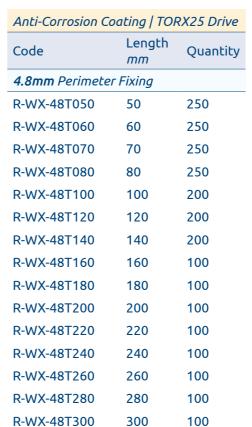


Code	Length <i>mm</i>	Quar
4.8mm Centre Fixin	ng .	
R-WX-48T080-A4	80	100
R-WX-48T100-A4	100	100
R-WX-48T120-A4	120	100
R-WX-48T140-A4	140	100
R-WX-48T160-A4	160	100
R-WX-48T180-A4	180	100
R-WX-48T200-A4	200	100
R-WX-48T220-A4	220	100
R-WX-48T240-A4	240	100
5.5mm Centre Fixin	g	
R-WX-55T260-A4	260	100
R-WX-55T300-A4	300	100
R-WX-55T325-A4	325	100
R-WX-55T350-A4	350	100









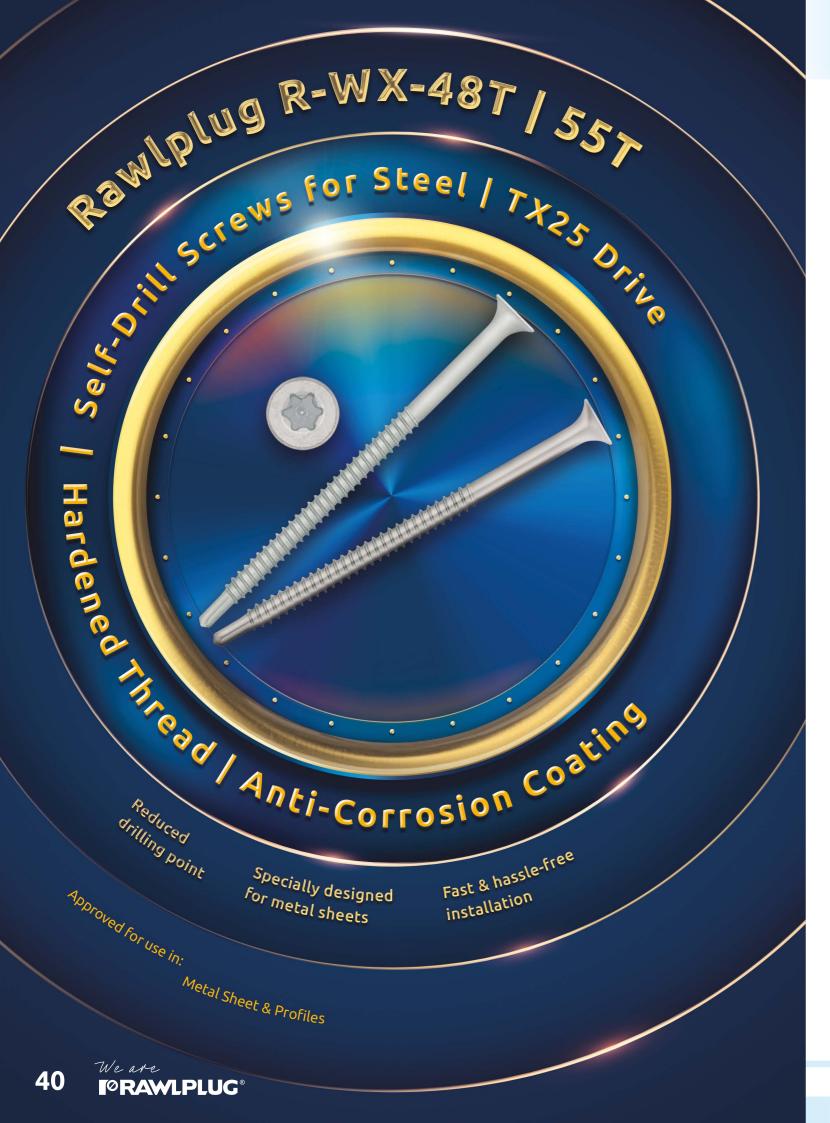

ETA-09/0346 | UKTA-22/6338













Rawlplug R-KC-60 60mm Spreader Washer


Insulation washer with integral cap suitable for attachment of insulation layers to wooden and sheet metal substrates

- Recommended for the attachment of ETICS to wooden substrates using R-PTX screws, or to sheet metal using R-WX-48T screws
- Special design of integral fastener cap allows reduction of thermal bridges.
- Consistent and reliable holding force
- Quick, simple and clean installation.
- Can be used in combination with additional KWL plate 90, 110 or 140mm diameter

Applications

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral Wool (MW) boards
- Polyurethane (PU) boards

Code	Diameter <i>mm</i>	Max Screw Size mm	Height <i>mm</i>	Quantity
R-KC-60	60	6	20	200
























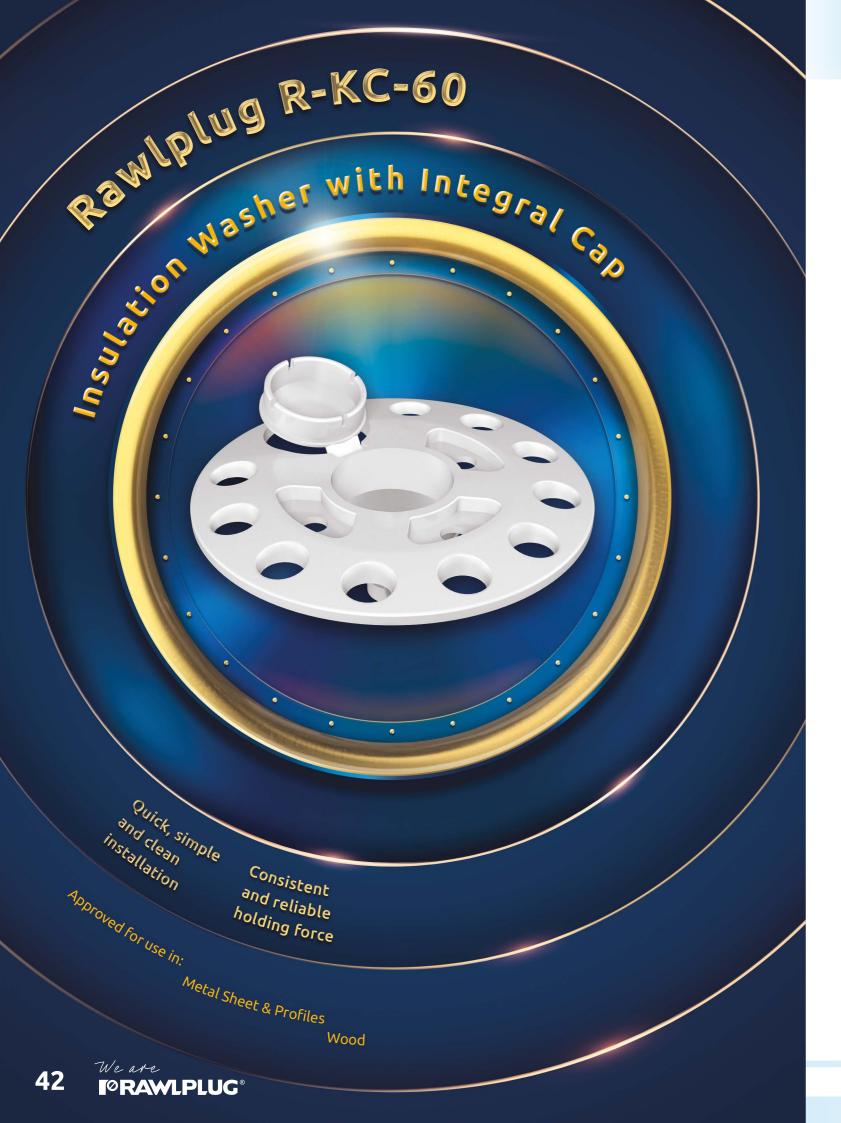

Insulation to SFS / Sheathing Boards / Concrete & Masonry

Rawlplug KWL-090PP 90mm Spreader Washer


Insulation retaining plate for use in combination with facade fixings

- Quick and easy application possible with all ETICS fixings
- · Polyamide standard versions are recommended for cost-effective applications
- A versatile solution for many insulation scenarios

Applications

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral Wool (MW) boards
- Polyurethane (PU) boards

Code	Diameter <i>mm</i>	Quantity
K/V/I -UOUDD	90	200

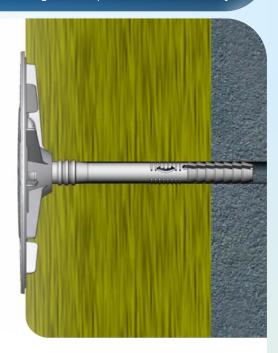









ETA-07/0221 | ETA-07/0291 | ETA-07/0336 | ETA-11/0144 | ETA-13/0845









Polystyrene (EPS) Boards

all Erics Fixings

Rawlelug KWL-090Pp

Insulation of the state of the

To Mith the KI range ende

Recommended for cost-effective

applications

Mineral Wool Boards

Rawlplug MKC & MKC-SS Steel Spreader Washer

Fire-resistant stainless steel washer for use in combination with metal facade fixings from MBA range

- Fire resistant washer
- Stainless steel washer (MKC-SS) for corrosion resistance
- Washer to suit all types of compressible thermal insulation materials
- Quick and easy application
- A versatile solution for many insulation scenarios

Applications

- Polystyrene (EPS) boards
- Polyurethane (PU) boards
- Mineral wool (MW) boards
- Cork boards
- Light wood wool boards

Steel Zinc		
Code	Diameter <i>mm</i>	Quantity
85mm		
MKC-85	85	250
35mm		
MKC-35	35	100

Stainless Stee	el .	
Code	Diameter <i>mm</i>	Quantity
85mm		
MKC-SS-85	85	250
NEW A2-304 Bi-Metal		
35mm		
MKC-SS-A2	35	100












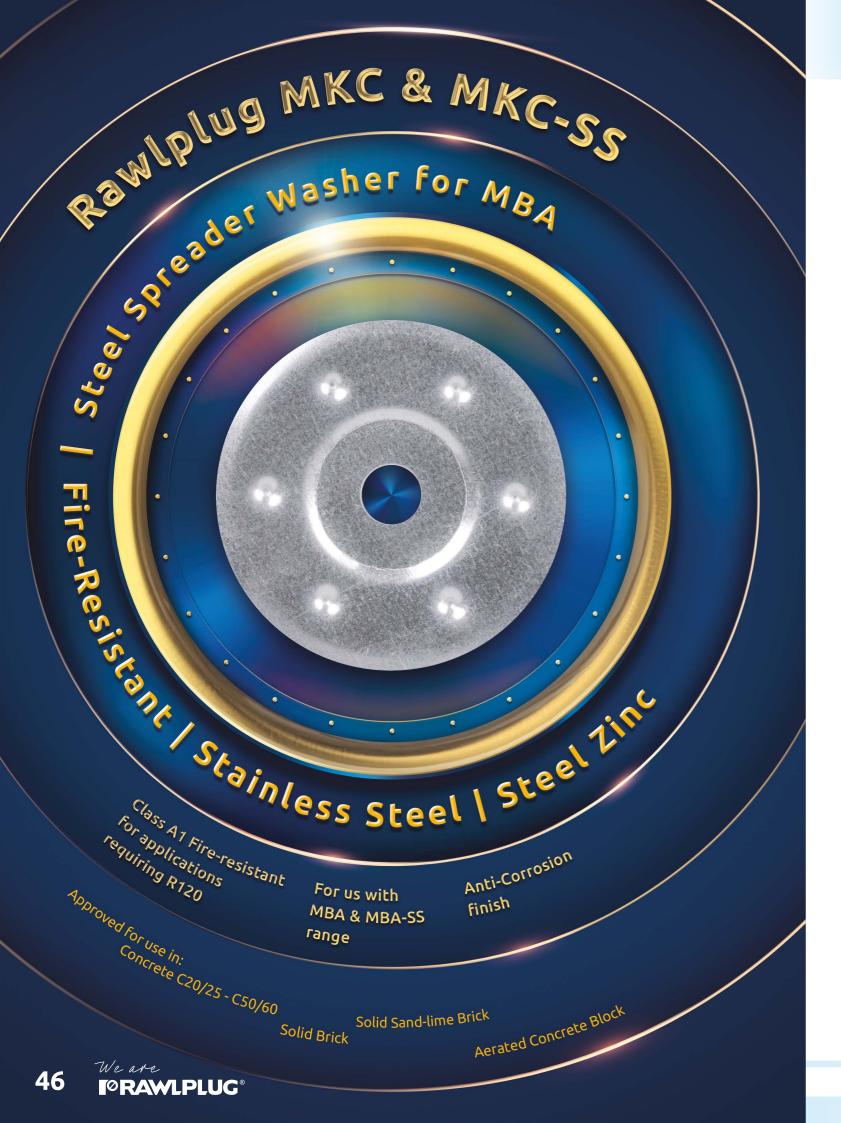

AT-15-8092/2009 | AT-15-8092/2009 - ANNEX No1 & No2















Rawlplug R-POK-ALZN Circular steel washer

Steel washer with special form for roofing applications, for use with all types of roofing screws

- Made of aluminium & zinc sheet
- High corrosion resistance
- Specially sculpted shape for trouble-free installation using dedicated rigid mounting screws for hard roof insulation

Applications

• Systems of mechanically fastened flexible roof waterproofing membrane



Code	Diameter mm	Quantit
R-POK-041-ALZN	40	100
R-POK-050-ALZN	50	100
R-POK-070-ALZN	70	100



Code	Diameter <i>mm</i>	Quantity
R-POK-06-ALZN	76	100

R-RSW-SS

85mm stainless steel spreader washer for use with self-drill screws



Code	Diameter <i>mm</i>	Quantity
R-RSW-85-SS	85	250



ETA-09/0346 | UKTA-22/6338












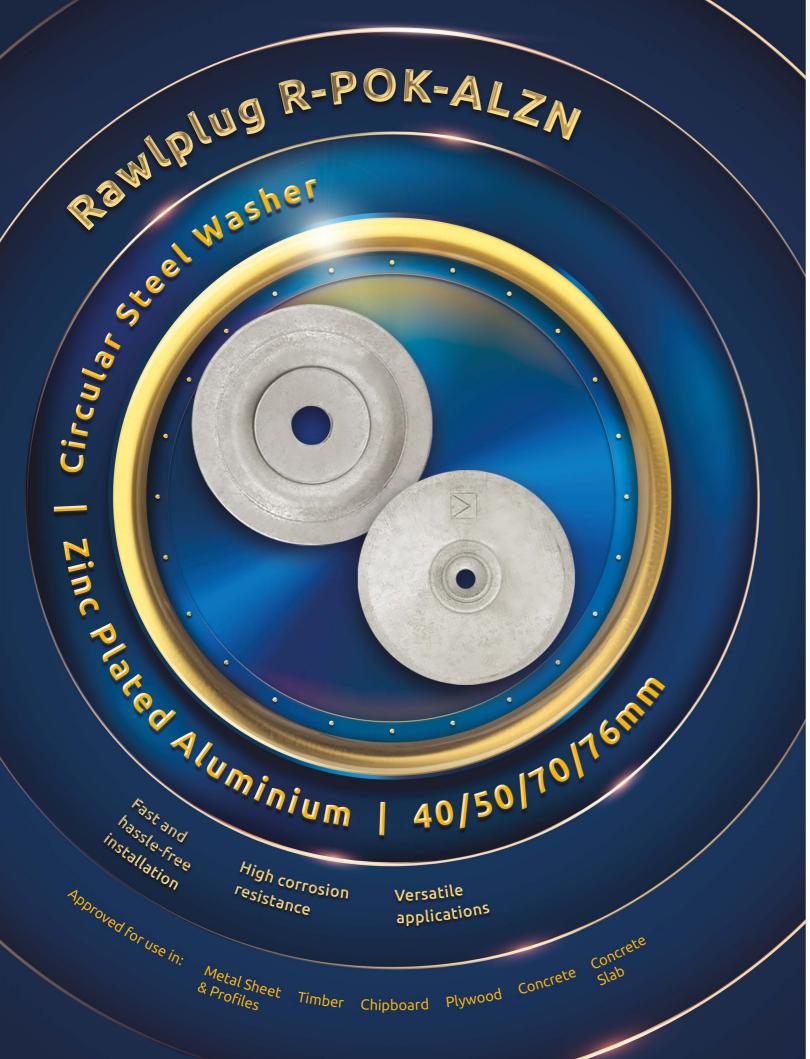





FEATURES / BENEFITS

Unlimited & smooth extrusions

No need for separate battery tools

Saves time and energy

Easy to store when not in use


Pressure control, with speed adjustable drills

Uses standard fittings to fit any battery drill

Full range of sizes to suit all cartridge types

12 Month manufacturer warranty

QUICK, SIMPLE, READY TO GO.

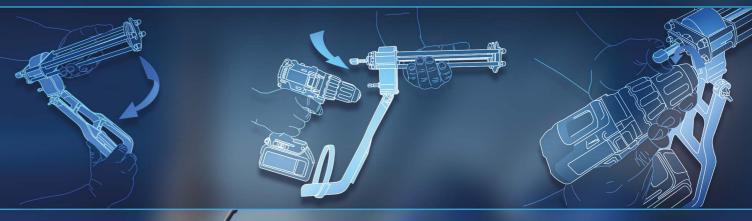



Rawldriver PERFECT COMPANION TO THE RESIN DRILL ADAPTER.

LISTINGS

LISTINGS						
Code	Cartridge Size	Description	Quantity			
TBC*	380/400/410ml	Drill Adapter Extrusion Tool	1			
TBC*	165/290/300/310ml	Drill Adapter Extrusion Tool	1			
TBC*	400/600ml Sausage	Drill Adapter for Sausage	1			

* You can call us on 0141 6387 961 or email sales@rawlplug.co.uk, quoting the product description

* Drill NOT included



R-PDD18 Drill Driver 18V




Anchor Range for helping Hand Brackets to Concrete & Masonry

R-HPTIII-A4 Product features | p.14-15 Helping Hand Brackets to Concrete High performance A4-316 stainless steel through bolt with minimum edge and axial spacing CE Code Drill Size Length Quantity R-HPTIIIA4-12115/40 115mm 50 R-HPTIIIA4-12125/50 M12 125mm 50 CFS+KERII + RODS / FOIL GUN / R-KER-II Product features | p.6-9 Helping Hand Brackets to Concrete High performance hybrid vinylester resin foil & cartridge with optimal waste reduction CE Code Size Type Quantity CFS+KERII-600 + R-STUDS Foil 600ml R-CFS+KERII Foil Gun 600ml R-KER-II-400-UK Cartridge 400ml R-FFS-K-A4 Product features | p.24-25 Helping Hand Brackets to Concrete & Masonry FFS High performance nylon frame fixing and A4-316 stainless steel screw with 40mm embedment CE Plug Code **Drill Size** Quantity **Screw** R-FFS-N-10K060-A4 M10 10 x 60mm 7 x 69mm 50 R-FF1-N-K-A4 Product features | p.26-27 Helping Hand Brackets to Concrete & Masonry FF1 High performance nylon frame fixing for all substrates and A4-316 stainless steel screw CE Code **Drill Size** Plug Length Quantity R-FF1-N-10K080-A4 50 M10 80mm 25 R-FF1-N-10K100-A4 M10 100mm R-LX-HF-A4 Product features | p.12-13 **Cavity Fire Brackets to Concrete** Direction of the section of New for 2024, R-LX A4-316 stainless steel concrete screwbolt CE







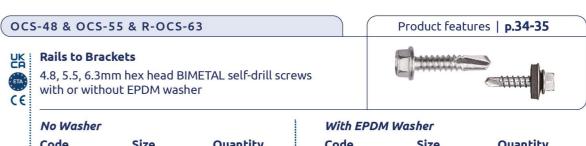

	No Washer			With EPDM Washer		
	Code	Size	Quantity	Code	Size	Quantity
	OCS-48019	4.8 x 19mm	200	OCS-48019S16	4.8 x 19mm	200
	OCS-55025	5.5 x 25mm	200	OCS-55025S16	5.5 x 25mm	200
	OCS-55038	5.5 x 38mm	200	OCS-55038S16	5.5 x 38mm	200
	OCS-55050	5.5 x 50mm	100	OCS-55050S16	5.5 x 50mm	100
	OCS-55070	5.5 x 70mm	100			
	New, Greater S	hear Capacity				
NEW	R-OCS-63038	6.3 x 38mm	100			
NEW	R-OCS-63050	6.3 x 50mm	100			

ON	S-55			P	roduct features	s p.38-39	
SFS to Heavy Section Steel 5.5mm hex head A2 stainless steel BIMETA self-drill screw, with or without EPDM wash							
2 2 2 2 3 3	No Washer			With EPDM Was	her		
	Code	Size	Quantity	Code	Size	Quantity	
!	ONS-55040	5.5 x 40mm	100	ONS-55040S16	5.5 x 40mm	100	

We are ORAWLPLUG®

R-LX-05X045-HF-A4

Drill Size

5.0mm

Size

6.3 x 45mm

Quantity

50

Code





Fixings for Render & Sheathing Board to SFS & Timber Frame

R-CWT-LG & R-CWTS-LG

Render / Sheathing Boards to Steel Frame

4.8mm CSK wing tip self-drill screws available in carbon steel ruspert & A2-304 BIMETAL + ruspert coating <3.5mm



Carbon Steel with R	9	
Code	Size	Quantit
R-CWT-48038-LG	4.8 x 38mm	200
P-CWT-48045-LG	48 v 45mm	200

A2-304 BIMETAL + Ruspert Coating

Code Size Quantity

R-CWTS-48038-LG 4.8 x 38mm 200

R-CBS & R-CBS-A2

Render / Sheathing Boards to Steel & Timber Frames

4.5mm CSK hi-lo thread self-drill screws available in carbon steel ruspert & A2-304 BIMETAL + ruspert coating <3.5mm



Carbon Steel with Ruspert Coating					
Code	Size	Quantity			
R-CBS-45032	4.5 x 32mm	200			
R-CBS-45042	4.5 x 42mm	200			
R-CBS-45062	4 5 x 62mm	200			

Carbon Steel with Ruspert Coating

Code	Size	Quantity
R-CBS-45032-A2	4.5 x 32mm	200
R-CBS-45042-A2	4.5 x 42mm	200
R-CBS-45062-A2	45 x 62mm	200



KI-10

Insulation to Concrete & Masonry

K : Insulation to Concrete & Masonry Perimeter Fixing

Plastic pin fixing for perimeter fixing on maximum insulation of 190mm



Code	Drill Size	Length	Plate Diameter	Fixture Thickness	Quantity
KI-070	10mm	70mm	60mm	35mm	250
KI-090	10mm	90mm	60mm	55mm	250
KI-120	10mm	120mm	60mm	85mm	250
KI-140	10mm	140mm	60mm	105mm	250
KI-160	10mm	160mm	60mm	125mm	250
KI-180	10mm	180mm	60mm	145mm	250
KI-200	10mm	200mm	60mm	165mm	250
KI-220	10mm	220mm	60mm	185mm	250





KI-10N

UK Insulation to Concrete & Masonry Perimeter Fixing

Metal pin fixing for perimeter fixing on maximum insulation of 275mm



Code	Drill Size	Length	Plate Diameter	Fixture Thickness	Quantity
KI-120N	10mm	120mm	60mm	60mm	250
KI-140N	10mm	140mm	60mm	70mm	250
KI-160N	10mm	160mm	60mm	90mm	250
KI-180N	10mm	180mm	60mm	110mm	250
KI-200N	10mm	200mm	60mm	130mm	250
KI-220N	10mm	220mm	60mm	150mm	250
KI-260N	10mm	260mm	60mm	190mm	200
KI-300N	10mm	300mm	60mm	210mm	200

R-TFIX-8S

CE

Insulation to Concrete & Masonry Perimeter Fixing

Metal screw fixing for perimeter fixing on maximum insulation of 430mm



Product features | p.20-21

Price & Availability per Enquiry

Please contact your Area Sales Manager or call 0141 638 7961

KWL-090PP

90mm Spreader Washer for KI-10 / KI-10N / R-TFIX-8S

Spreader washer for all concrete & masonry perimeter fixings



Code	Size	Quantity
KWL-090PP	90mm	200





Insulation to Concrete & Masonry (Continued)

MBA & MBA-SS

Insulation to Concrete & Masonry Centre Fixing

Centre fixing with fire rating (tested up to 120mins) available in carbon steel zinc & stainless steel



CE B

NEW

NEW

NEW

NEW

NEW

Carbon Steel Zinc - Maximum Insulation of 270mm

Code	Drill Size	Length	Plate Diameter	Quantity
MBA-08090	8mm	90mm	40mm	250
MBA-08110	8mm	110mm	40mm	250
MBA-08140	8mm	140mm	40mm	250
MBA-08170	8mm	170mm	40mm	250
MBA-08200	8mm	200mm	40mm	250
R-MBA-08210	8mm	210mm	40mm	250
R-MBA-08230	8mm	230mm	40mm	250
MBA-08250	8mm	250mm	40mm	125
MBA-08300	8mm	300mm	40mm	125

Stainless Steel - Maximum Insulation of 270mm

Code	Drill Size	Length	Plate Diameter	Quantity
MBA-SS-08090	8mm	90mm	40mm	250
MBA-SS-08110	8mm	110mm	40mm	250
MBA-SS-08140	8mm	140mm	40mm	250
MBA-SS-08170	8mm	170mm	40mm	250
MBA-SS-08200	8mm	200mm	40mm	250
MBA-SS-08250	8mm	250mm	40mm	125
MBA-SS-08300	8mm	300mm	40mm	125
MBA-SS-08330	8mm	330mm	40mm	125
MBA-SS-08370	8mm	370mm	40mm	125
MBA-SS-08400	8mm	400mm	40mm	250

MKC & MKC-SS

Spreader Washer for MBA & MBA-SS

85mm washer for centre fixing with fire rating (tested up to 120mins) available in carbon steel zinc & stainless steel



Steel Zinc **V**-

*****	Code	Diameter	Quantity
	MKC-85	85mm	250
	MKC-35	35mm	100

Stainless Steel

Code	Diameter	Quantity
MKC-SS-85	85mm	250

New A2-304 BIMETAL

MKC-035-A2 35mm 100





R-KCX-A2

Insulation to Concrete & Masonry Centre Fixing

Stainless steel tube for use with R-WBT-61 concrete screws, maximum insulation of 600mm



Price & Availability per Enquiry Code R-KCX-155-A2 Please contact your Area Sales Manager or call 0141 638 7961 R-KCX-255-A2

R-KCX-W-A2 & R-KCX-CAP-A2

UK 70mm Spreader Washer & Cap for R-KCX-A2

Stainless steel spreader washer & optional cover cap for centre fixing





Code Price & Availability per Enquiry R-KCX-70W-A2 Please contact your Area Sales Manager or call 0141 638 7961 R-KCX-CAP-A2



Insulation to SFS & Sheathing Boards

R-WX & R-WX-A4

R-WX-48T280

R-WX-48T300

280mm

300mm

Insulation to Render / Sheathing Boards & Steel Frame Self-drill CSK screw for perimeter & centre fixing, available in high quality anti-corrosion coating & A4 stainless steel



4.8mm, Perime Anti-Corrosion	4.8mm, A4-316		
Code	Code		
R-WX-48T050	50mm	250	R-WX-4
R-WX-48T060	60mm	250	R-WX-4
R-WX-48T070	70mm	250	R-WX-4
R-WX-48T080	80mm	250	R-WX-4
R-WX-48T100	100mm	200	R-WX-4
R-WX-48T120	120mm	200	R-WX-4
R-WX-48T140	140mm	200	R-WX-4
R-WX-48T160	160mm	100	R-WX-4
R-WX-48T180	180mm	100	R-WX-4
R-WX-48T200	200mm	100	5.5mm
R-WX-48T220	220mm	100	R-WX-5
R-WX-48T240	240mm	100	R-WX-5
R-WX-48T260	260mm	100	DWYE

100

100

, Centre Fixing, 6 Stainless Steel, TORX25 Drive

Code	Length	Quantity
R-WX-48T080-A4	80mm	100
R-WX-48T100-A4	100mm	100
R-WX-48T120-A4	120mm	100
R-WX-48T140-A4	140mm	100
R-WX-48T160-A4	160mm	100
R-WX-48T180-A4	180mm	100
R-WX-48T200-A4	200mm	100
R-WX-48T220-A4	220mm	100
R-WX-48T240-A4	240mm	100
5.5mm		
R-WX-55T260-A4	260mm	100
R-WX-55T300-A4	300mm	100
R-WX-55T325-A4	325mm	100
R-WX-55T350-A4	350mm	100





Insulation to SFS & Sheathing Boards (Continued)

R-KC-60

Product features | p.42-43

Insulation to Render / Sheathing Boards & Steel Fi

Capped washer for use with R-WX-48T self-drill screw for perimeter fixing

rame	9-3
WS	
	(00)

Code	Diameter	Max Screw Size	Height	Quantity
R-KC-60	60mm	6mm	20mm	200

KWL-090PP

Product features | p.44-45



90mm Spreader washer for all SFS / sheathing board perimeter fixings





Code	Size	Quantity
KIMI -000DD	90mm	200

OCS-55/63

CE

Product features | p.36-37

Insulation to Render / Sheathing Boards & Steel Frame





6.3mm, A2 Stainless Steel, Anti-Corrosion			6.3mm, Carbon Steel, Anti-Corrosion			
Code	Length	Quantity	Code	Length	Quantity	
OCS-55/63090	90mm	100	R-OC-55/63080G16	80mm	100	
OCS-55/63110	110mm	100	R-OC-55/63105G16	105mm	100	
OCS-55/63130	130mm	100	R-OC-55/63135G16	135mm	100	
OCS-55/63150	150mm	100	R-OC-55/63150G16	150mm	100	
OCS-55/63170	170mm	100				
R-OCS-55/63200	200mm	100				
OCS-55/63230	230mm	100				
R-OCS-55/63270	270mm	100				
R-OCS-55/63300	300mm	100				

R-RSW-SS

Insulation to Render / Sheathing Boards & Steel Frame

85mm stainless steel spreader washer for use with self-drill screws



Code	Diameter	Quantity	
R-RSW-85-SS	85mm	250	





R-WBT Product features | p.10-11 Soffit Liner to Concrete 6.1mm concrete screw with high quality anti-corrosion zinc-flake coating, TORX25 drive

Code	Drill Size	Size	Quan	tity
R-WBT-61050	6.1mm	50mm	100	
R-WBT-61075	6.1mm	75mm	100	
R-WBT-61090	6.1mm	90mm	100	
R-WBT-61100	6.1mm	100mm	100	
R-WBT-61120	6.1mm	120mm	100	
R-WBT-61140	6.1mm	140mm	100	
R-WBT-61160	6.1mm	160mm	100	
R-WBT-61H160	6.1mm	160mm	100	Clearance
R-WBT-61180	6.1mm	180mm	100	
R-WBT-61H180	6.1mm	180mm	100	Clearance
R-WBT-61200	6.1mm	200mm	100	
R-WBT-61220	6.1mm	220mm	100	
R-WBT-61240	6.1mm	240mm	100	
R-WBT-61260	6.1mm	260mm	100	
R-WBT-61300	6.1mm	300mm	100	
R-WBT-61350	6.1mm	350mm	100	
R-WBT-61400	6.1mm	400mm	100	

R-POK-ALZN Product features | p.48-49 **Soffit Liner to Concrete** Aluminium spreader washers with anti-corrosion

zinc plating, for use with R-WBT concrete screws

	Code	Size	Quantity	Code	Size	Quantity
	R-POK-041-ALZN	40mm	100	R-POK-06-ALZN	76mm	100
-	R-POK-050-ALZN	50mm	100			
;	R-POK-070-ALZN	70mm	100			

TORX 25 Screwdriver Bits

T Type Precision Milled & Special Long Screwdriver Bits CE



Code	Length	Quantity	Code	Length	Quantity
RT-BIT-TORX25X3	25mm	3	RT-BIT-TORX25/100	100mm	1
RT-BIT-TORX25/25	25mm	20	RT-BIT-TORX25/150	150mm	1
			RT-BIT-TORX25/200	200mm	1
			RT-BIT-TORX25/250	250mm	1
			RT-BIT-TORX25/350	350mm	1
			RT-BIT-TORX25/450	450mm	1





Mineral Wool Rainscreen Slab to Concrete

PLASTIC PERIMETER FIXING

ETA CE Façade fixings with plastic and metal pin and plastic washer

and prastic washer						
KI-10 Product Features p.16-17	KI-10N Product Features p.18-19	KWL-090PP Product Features p.44-45				

Insulation Thickness	Fixing Combination
40mm	KI-070 + KWL-090PP
50mm	KI-090 + KWL-090PP
60mm	KI-090 + KWL-090PP
70mm	KI-120 + KWL-090PP
80mm	KI-120 + KWL-090PP
90mm	KI-120 + KWL-090PP
100mm	KI-140 + KWL-090PP
110mm	KI-140 + KWL-090PP
120mm	KI-160 + KWL-090PP
130mm	KI-160 + KWL-090PP
140mm	KI-180 + KWL-090PP
150mm	KI-180 + KWL-090PP
160mm	KI-200 + KWL-090PP
170mm	KI-200 + KWL-090PP
180mm	KI-220 + KWL-090PP
190mm	KI-220 + KWL-090PP
200mm	KI-260N + KWL-090PP
210mm	KI-260N + KWL-090PP
220mm	KI-260N + KWL-090PP
230mm	KI-260N + KWL-090PP
240mm	KI-300N + KWL-090PP
250mm	KI-300N + KWL-090PP
260mm	KI-300N + KWL-090PP
270mm	KI-300N + KWL-090PP
280mm	TBA
290mm	TBA
300mm	TBA
310mm	TBA
320mm	TBA
330mm	TBA
340mm	TBA

TBA







Insulation Thickness	Fixing Combination Standard Embedment 40mm	Insulation Thickness	Fixing Combination Reduced Embedment 30mm
40mm	MBA-SS-08 090 + MKC-SS-85	40mm	MBA-SS-08 090 + MKC-SS-85
50mm	MBA-SS-08 090 + MKC-SS-85	50mm	MBA-SS-08 090 + MKC-SS-85
60mm	MBA-SS-08110 + MKC-SS-85	60mm	MBA-SS-08 090 + MKC-SS-85
70mm	MBA-SS-08110 + MKC-SS-85	70mm	MBA-SS-08110 + MKC-SS-85
80mm	MBA-SS-08140 + MKC-SS-85	80mm	MBA-SS-08110 + MKC-SS-85
90mm	MBA-SS-08140 + MKC-SS-85	90mm	MBA-SS-08140 + MKC-SS-85
100mm	MBA-SS-08140 + MKC-SS-85	100mm	MBA-SS-08140 + MKC-SS-85
110mm	MBA-SS-08170 + MKC-SS-85	110mm	MBA-SS-08140 + MKC-SS-85
120mm	MBA-SS-08170 + MKC-SS-85	120mm	MBA-SS-08170 + MKC-SS-85
130mm	MBA-SS-08170 + MKC-SS-85	130mm	MBA-SS-08170 + MKC-SS-85
140mm	MBA-SS-08200 + MKC-SS-85	140mm	MBA-SS-08170 + MKC-SS-85
150mm	MBA-SS-08200 + MKC-SS-85	150mm	MBA-SS-08200 + MKC-SS-85
160mm	MBA-SS-08200 + MKC-SS-85	160mm	MBA-SS-08200 + MKC-SS-85
170mm	MBA-SS-08 250 + MKC-SS-85	170mm	MBA-SS-08200 + MKC-SS-85
180mm	MBA-SS-08 250 + MKC-SS-85	180mm	MBA-SS-08 250 + MKC-SS-85
190mm	MBA-SS-08 250 + MKC-SS-85	190mm	MBA-SS-08 250 + MKC-SS-85
200mm	MBA-SS-08 250 + MKC-SS-85	200mm	MBA-SS-08 250 + MKC-SS-85
210mm	MBA-SS-08 250 + MKC-SS-85	210mm	MBA-SS-08 250 + MKC-SS-85
220mm	MBA-SS-08300 + MKC-SS-85	220mm	MBA-SS-08 250 + MKC-SS-85
230mm	MBA-SS-08 300 + MKC-SS-85	230mm	MBA-SS-08300 + MKC-SS-85
240mm	MBA-SS-08300 + MKC-SS-85	240mm	MBA-SS-08300 + MKC-SS-85
250mm	MBA-SS-08300 + MKC-SS-85	250mm	MBA-SS-08300 + MKC-SS-85
260mm	MBA-SS-08300 + MKC-SS-85	260mm	MBA-SS-08300 + MKC-SS-85
270mm	TBA	270mm	MBA-SS-08300 + MKC-SS-85
280mm	TBA	280mm	TBA
290mm	TBA	290mm	TBA
300mm	TBA	300mm	TBA
310mm	TBA	310mm	TBA
320mm	TBA	320mm	TBA
330mm	TBA	330mm	TBA
340mm	TBA	340mm	TBA
350mm	TBA	350mm	TBA

350mm





Mineral Wool Rainscreen Slab to LSF / Sheathing Board

PLASTIC PERIMETER FIXING



High quality anti-corrosion self-drill screw & plastic capped / plastic washer combination allows for 12.5mm sheathing board + 1.5mm steel frame

R-WX-48T Product Features p.40-41	R-KC-60 (Capped Washer) Product Features p.42-43	KWL-090PP Product Features p.44-45

Insulation Thickness	Fixing Combination
40mm	R-KC-60 + KWL-090PP + R-WX-48T 070
50mm	R-KC-60 + KWL-090PP + R-WX-48T 080
60mm	R-KC-60 + KWL-090PP + R-WX-48T100
70mm	R-KC-60 + KWL-090PP + R-WX-48T100
80mm	R-KC-60 + KWL-090PP + R-WX-48T120
90mm	R-KC-60 + KWL-090PP + R-WX-48T120
100mm	R-KC-60 + KWL-090PP + R-WX-48T 140
110mm	R-KC-60 + KWL-090PP + R-WX-48T 140
120mm	R-KC-60 + KWL-090PP + R-WX-48T 160
130mm	R-KC-60 + KWL-090PP + R-WX-48T 160
140mm	R-KC-60 + KWL-090PP + R-WX-48T180
150mm	R-KC-60 + KWL-090PP + R-WX-48T 180
160mm	R-KC-60 + KWL-090PP + R-WX-48T200
170mm	R-KC-60 + KWL-090PP + R-WX-48T 200
180mm	R-KC-60 + KWL-090PP + R-WX-48T220
190mm	R-KC-60 + KWL-090PP + R-WX-48T220
200mm	R-KC-60 + KWL-090PP + R-WX-48T 240
210mm	R-KC-60 + KWL-090PP + R-WX-48T 240
220mm	R-KC-60 + KWL-090PP + R-WX-48T 260
230mm	R-KC-60 + KWL-090PP + R-WX-48T 260
240mm	R-KC-60 + KWL-090PP + R-WX-48T300
250mm	R-KC-60 + KWL-090PP + R-WX-48T300
260mm	R-KC-60 + KWL-090PP + R-WX-48T300
270mm	R-KC-60 + KWL-090PP + R-WX-48T300
280mm	TBA
290mm	TBA
300mm	TBA
310mm	TBA
320mm	TBA
330mm	TBA
340mm	TBA
350mm	TBA





Mineral Wool Rainscreen Slab to LSF / Sheathing Board

STAIN	NLESS STEEL CENTRE FIXING		
UK ETA	Stainless steel self-drill screw & washer combination allows for 12.5mm sheathing board + 1.5mm steel frame		
CE			
•	OCS-55/63 Product Features p.36-37	R-RSW-85-SS Product Features p.48-49	

Insulation Thickness	Fixing Combination
40mm	OCS-55/63090 + R-RSW-85-SS
50mm	OCS-55/63090 + R-RSW-85-SS
60mm	OCS-55/63 090 + R-RSW-85-SS
70mm	OCS-55/63110 + R-RSW-85-SS
80mm	OCS-55/63110 + R-RSW-85-SS
90mm	OCS-55/63130 + R-RSW-85-SS
100mm	OCS-55/63130 + R-RSW-85-SS
110mm	OCS-55/63 150 + R-RSW-85-SS
120mm	OCS-55/63 150 + R-RSW-85-SS
130mm	OCS-55/63170 + R-RSW-85-SS
140mm	OCS-55/63170 + R-RSW-85-SS
150mm	R-OCS-55/63200 + R-RSW-85-SS
160mm	R-OCS-55/63 200 + R-RSW-85-SS
170mm	R-OCS-55/63200 + R-RSW-85-SS
180mm	OCS-55/63230 + R-RSW-85-SS
190mm	OCS-55/63230 + R-RSW-85-SS
200mm	OCS-55/63 230 + R-RSW-85-SS
210mm	R-OCS-55/63 270 + R-RSW-85-SS
220mm	R-OCS-55/63270 + R-RSW-85-SS
230mm	R-OCS-55/63 270 + R-RSW-85-SS
240mm	R-OCS-55/63 270 + R-RSW-85-SS
250mm	R-OCS-55/63300 + R-RSW-85-SS
260mm	R-OCS-55/63 300 + R-RSW-85-SS
270mm	R-OCS-55/63 300 + R-RSW-85-SS
280mm	TBA
290mm	TBA
300mm	TBA
310mm	TBA
320mm	TBA
330mm	TBA
340mm	TBA
350mm	TBA





Soft Faced Mineral Wool Soffit Slab to Concrete

SOFFIT SLAB TO CONCRETE SUBSTRATES Zinc flake coated anti-corrosion concrete screw & washer combination CE STATE OF THE PROPERTY OF TH R-WBT-61 R-POK-06-ALZN Product Features | p.48-49 Product Features | p.10-11

Insulation Thickness		Insulation Thickness	Fixing Combination (Continued)
40mm	R-WBT-61 075 + R-POK-06-ALZN	220mm	R-WBT-61 260 + R-POK-06-ALZN
50mm	R-WBT-61 090 + R-POK-06-ALZN	230mm	R-WBT-61 260 + R-POK-06-ALZN
60mm	R-WBT-61 090 + R-POK-06-ALZN	240mm	R-WBT-61 300 + R-POK-06-ALZN
70mm	R-WBT-61 120 + R-POK-06-ALZN	250mm	R-WBT-61 300 + R-POK-06-ALZN
80mm	R-WBT-61120 + R-POK-06-ALZN	260mm	R-WBT-61 300 + R-POK-06-ALZN
90mm	R-WBT-61 120 + R-POK-06-ALZN	270mm	R-WBT-61 300 + R-POK-06-ALZN
100mm	R-WBT-61 140 + R-POK-06-ALZN	280mm	R-WBT-61 350 + R-POK-06-ALZN
110mm	R-WBT-61 140 + R-POK-06-ALZN	290mm	R-WBT-61 350 + R-POK-06-ALZN
120mm	R-WBT-61 160 + R-POK-06-ALZN	300mm	R-WBT-61 350 + R-POK-06-ALZN
130mm	R-WBT-61 160 + R-POK-06-ALZN	310mm	R-WBT-61 350 + R-POK-06-ALZN
140mm	R-WBT-61 180 + R-POK-06-ALZN	320mm	R-WBT-61 350 + R-POK-06-ALZN
150mm	R-WBT-61 180 + R-POK-06-ALZN	330mm	R-WBT-61 400 + R-POK-06-ALZN
160mm	R-WBT-61200 + R-POK-06-ALZN	340mm	R-WBT-61 400 + R-POK-06-ALZN
170mm	R-WBT-61200 + R-POK-06-ALZN	350mm	R-WBT-61 400 + R-POK-06-ALZN
180mm	R-WBT-61 220 + R-POK-06-ALZN	360mm	R-WBT-61 400 + R-POK-06-ALZN
190mm	R-WBT-61 220 + R-POK-06-ALZN	370mm	R-WBT-61 400 + R-POK-06-ALZN
200mm	R-WBT-61240 + R-POK-06-ALZN		

FIRE RESISTANCE REPORT FOR R-WBT-61 & R-POK-06-ALZN

R-WBT-61240 + R-POK-06-ALZN

	Resistance to Fire	R-WBT & R-POK-06		
7155	R30	Load Characteristic	(kN)	0.09
	R60	in Tension	(kN)	0.09
	R90	FRK,f1	(kN)	0.09
	R120		(kN)	0.08
	Axial Spacing	Scr,f1	(mm)	4 x h ef
	Edge Distance	Ccr,f1	(mm)	2 x h ef

In case of fire from more than one direction, distance to the edge should be 300mm+

Recommended partial safety factor: Ym,fi = 1,0; hef = 25mm





Soft Faced Mineral Wool Soffit Slab to Concrete

SOFFIT SLAB TO CONCRETE SUBSTRATES DUAL OPTIONS				
UK TA	Steel zinc (MBA / MKC) or stainless steel (MBA-SS / MKC-SS) façade fixings & washers			
(E		· (i)		
	MBA & MBA-SS Product Features p.22-23	MKC & MKC-SS Product Features p.46-47		

	Steel Zinc		Stainless Steel		
***************************************	Insulation Thickness	Fixing Combination	Insulation Thickness	Fixing Combination	
	40mm	MBA-08 090 + MKC-85	40mm	MBA-SS-08 090 + MKC-SS-85	
:	50mm	MBA-08 090 + MKC-85	50mm	MBA-SS-08 090 + MKC-SS-85	
	60mm	MBA-08110 + MKC-85	60mm	MBA-SS-08110 + MKC-SS-85	
	70mm	MBA-08110 + MKC-85	70mm	MBA-SS-08 110 + MKC-SS-85	
:	80mm	MBA-08140 + MKC-85	80mm	MBA-SS-08 140 + MKC-SS-85	
:	90mm	MBA-08 140 + MKC-85	90mm	MBA-SS-08 140 + MKC-SS-85	
:	100mm	MBA-08 140 + MKC-85	100mm	MBA-SS-08 140 + MKC-SS-85	
:	110mm	MBA-08 170 + MKC-85	110mm	MBA-SS-08 170 + MKC-SS-85	
	120mm	MBA-08 170 + MKC-85	120mm	MBA-SS-08 170 + MKC-SS-85	
:	130mm	MBA-08 170 + MKC-85	130mm	MBA-SS-08 170 + MKC-SS-85	
:	140mm	MBA-08 200 + MKC-85	140mm	MBA-SS-08 200 + MKC-SS-85	
	150mm	MBA-08 200 + MKC-85	150mm	MBA-SS-08 200 + MKC-SS-85	
:	160mm	MBA-08 200 + MKC-85	160mm	MBA-SS-08 200 + MKC-SS-85	
:	170mm	MBA-08 250 + MKC-85	170mm	MBA-SS-08 250 + MKC-SS-85	
	180mm	MBA-08 250 + MKC-85	180mm	MBA-SS-08 250 + MKC-SS-85	
:	190mm	MBA-08 250 + MKC-85	190mm	MBA-SS-08 250 + MKC-SS-85	
:	200mm	MBA-08 250 + MKC-85	200mm	MBA-SS-08 250 + MKC-SS-85	
	210mm	MBA-08 250 + MKC-85	210mm	MBA-SS-08 250 + MKC-SS-85	
:	220mm	MBA-08300 + MKC-85	220mm	MBA-SS-08 300 + MKC-SS-85	
:	230mm	MBA-08 300 + MKC-85	230mm	MBA-SS-08 300 + MKC-SS-85	
	240mm	MBA-08 300 + MKC-85	240mm	MBA-SS-08 300 + MKC-SS-85	
***************************************	250mm	MBA-08300 + MKC-85	250mm	MBA-SS-08 300 + MKC-SS-85	
:	260mm	MBA-08300 + MKC-85	260mm	MBA-SS-08 300 + MKC-SS-85	

The insulation fixing options listed are for guidance only and care should be taken to follow the insulation manufacturers guidance with regards to fixing patterns and the level of corrossion resistance required for the application. The use of a spreader washer is predominantly for mineral wool type insulation slabs. Where a phenolic or rigid insulation is being used there may not be a requirement for the additional washer but guidance should be sought from the relevant insulation manufacturer.

Load values for the MBA at reduced emabedment are available on request.

210mm





High Impact Soffit Slab to Concrete

Product Features | p.10-11

HIGH IMPACT SOFFIT SLAB TO CONCRETE SUBSTRATES

Zinc flake coated anti-corrosion concrete screw & washer combination

R-WBT-61 R-POK-041-ALZN

 Insulation Thickness
 Fixing Combination

 136mm
 R-WBT-61180 + R-POK-041-ALZN

 166mm
 R-WBT-61200 + R-POK-041-ALZN

 191mm
 R-WBT-61220 + R-POK-041-ALZN

 226mm
 R-WBT-61260 + R-POK-041-ALZN

Product Features | p.48-49

HIGH IMPACT SOFFIT SLAB TO CONCRETE SUBSTRATES



Steel zinc (MBA) or stainless steel (MBA-SS) façade fixings



MBA & MBA-SS
Product Features | p.22-23


 Insulation Thickness
 Fixing Combination

 136mm
 MBA-08170 / MBA-SS-08170

 166mm
 MBA-08250 / MBA-SS-08250

 191mm
 MBA-08250 / MBA-SS-08250

 226mm
 MBA-08300 / MBA-SS-08300

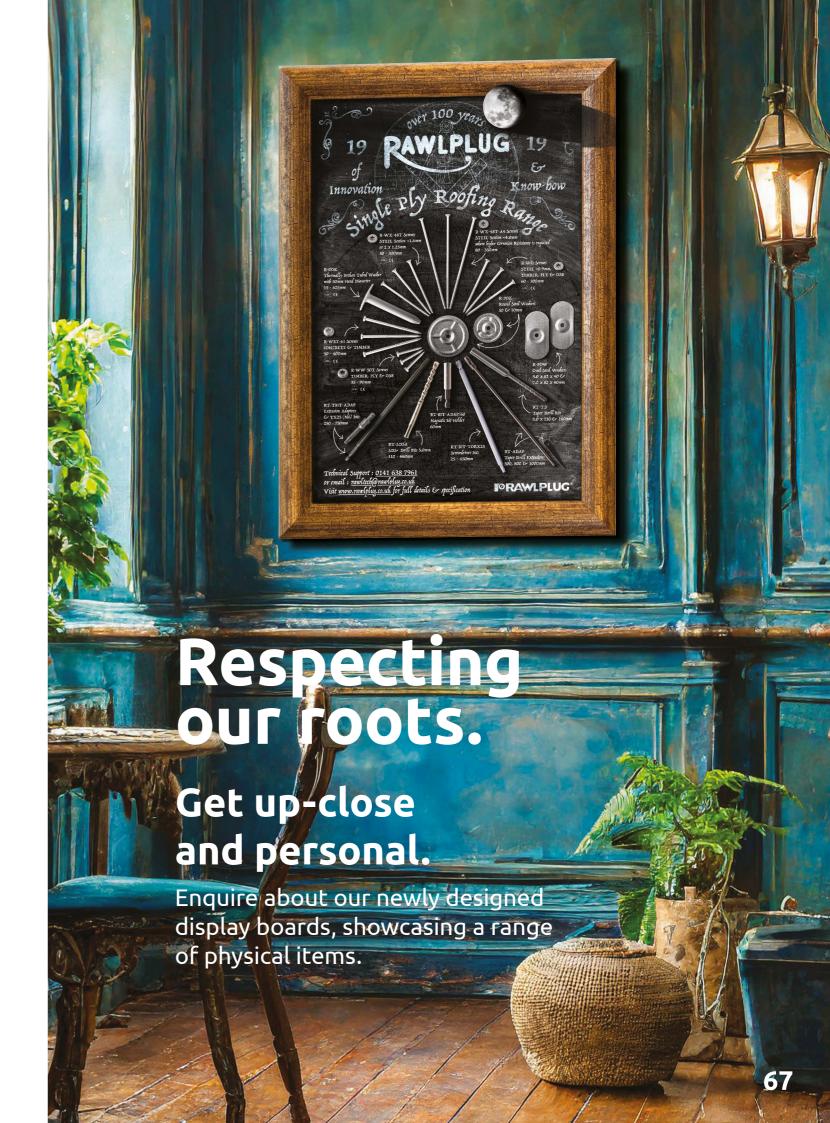

Onsite Technical Support

Technical advisory provided by local engineering teams to tackle all technical challenges, particularly with regards to on-site strength testing of the Rawlplug® products under real-life operating conditions.

- Technical support offered by our engineers on a local basis, on the given construction investment's location.
- Site testing of the Rawlplug® products under real-life operating conditions.
- Signature standard based on EAD, BS:8539 and the relevant recommendations of the British Construction Fixings Association.
- Repeated testing to confirm reliability of original test results.
- Detailed reports taking all technical parameters and our experts' individual recommendations into consideration.
- CFA (Construction Fixing Association) accredited on-site testing

Technical Helpdesk

Consultations and technical/design support provided by the Technical Department's engineers, practitioners and market experts.

- Technical and design-related consultations with our Technical Department's engineers.
- Systematic and structured handling of problem-solving tasks, thanks to forms dedicated to specific applications and products.
- Personalised design assistance with the specificity and requirements of individual solutions in mind.

HOW TO SUBMIT ENQUIRIES?

Enquiries are submitted via Rawlplug's website. You simply need to pick the right form, enter your data and information about your project, and submit the enquiry form. Our employees contact the website using the RTH tab of our corporate portal.

The new format is user-friendly, and it provides our engineers with enhanced tools, since now they have access to all enquiries at one place.



Easy Fix

Design calculations required to plan fixings for diverse construction elements using Rawlplug® branded products.

- Proprietary and free-of-charge application for design calculations, responding to even the most specific requirements of construction investments
- Divided into subject-specific modules dedicated to individual segments of construction works.
- Based on the latest EAD, ETAG and EUROCODE guidelines, ensuring that calculations conform to the standards, that they are precise and highly useful.
- Highly specialised features combined with simplicity and intuitiveness of use to support every designer and ensure safety of the solutions being designed.

ACCESS TO EASYFIX

The EasyFix application is free to download and use. You can download the software from www.easyfix.rawlplug.com/en

Product Selector

Appropriate selection of products to match specific applications by taking the project's requirements and particular requirements into account.

- Possibility to choose products from among 10 product categories in a selection-assisted process.
- Numerous convenient product browsing options relevant from the intended use perspective.
- Transparent and highly functional presentation of useful information.
- Option to enquire about product availability or specific properties.

BIM

Automatic implementation of models and technical drawings of the Rawlplug® fixings in the BIM/CAD design environment.

- Proprietary application enabling models and technical drawings of the Rawlplug® fixings to be downloaded and embedded in designs.
- Comprehensive sets of product data making design-related decisions easier.
- Models and drawings available in 2D and 3D, in 6 projections and the 360° view mode.
- Available on-line or ready to download and implement in the BIM/CAD environment.

ACCESS TO SOFTWARE

There are two ways to use BIM:

Integration of BIM Rawlplug with Autodesk® Revit®

Integration of Autodesk® Revit® via the Revit plug-in. Just download the plug-in from rawlplug.com in the Services/Design & Software tab.

Using on-line software

BIM Rawlplug is an application that can be downloaded from the Services/Design & Software tab on rawlplug.com. It may be used by anyone who intends to browse through and become familiar with the models, drawings and information the system provides, without being forced to register and subsequently log on.

Technical Library

Complete portfolio of technical documentation required to place the products on the market as well as to select and use them in the right manner.

- Option to pick from among 15 categories of information and documents required to make the right choice of the brand's products and to use them correctly.
- Complete set of product-specific technical and commercial documents.
- Original documents as well as documentation required for legal purposes, enabling distribution, designing and use of fixing solutions.





SEARCH

Bonded Anchors	Pag	ges		
R-CFS+ KERII + R-STUDS	06	07	52	
R-KERII	08	09	52	

Concrete Screws

R-WBT-61	10	11	59
	61	66	

Concrete Screwbolts

R-LX-HF-A4	12 13	152
111 -1111 111	12 10	100

Concrete Throughbolts

R-HPTIII-A4	14	15	52

Façade Fixings

KI-10	16	17	54	60
KI-10N	18	19	55	60
R-TFIX-8S	20	21	55	

Steel Façade Fixings

R-KCX-A2	11 57
MBA	22 23 56
	65 66
MBA-SS	22 23 56
	61 65 66

Frame Fixings

R-FFS-K-A4	24	25	52	
R-FF1-N-K-A4	26	27	52	

Self-Drill Screws	Page/s	
R-CBS-45	28 29 54	
R-CBS-45 -A2	28 29 54	-
R-CWT-LG	30 31 54	
R-CWTS-LG	30 31 54	
R-PH-LG	32 33 53	
R-PH-HG	32 33 53	
OCS-48	34 35 53	
OCS-55	34 35 53	
R-OCS-63	34 35 53	
OCS-55/63	36 37 58 63	
ONS-55	38 39 53	
R-WX-48T	40 41 57 62	
R-WX-48T-A4	40 41	
R-WX-55T-A4	40 41	-

Spreader Washers

R-KC-60	42	43	58	62
KWI-090PP	44	45	55	158160162

Steel Spreader Washers

R-KCX-70W-A2	57
R-KCX-CAP-A2 (Cap)	57
MKC	46 47 56 65
MKC-SS	46 47 56 61 65
R-POK-ALZN	48 49 59 66
R-POK-06-ALZN	48 49 59 64
R-RSW-85-SS	48 49 58 63


Resin Extrusion Tools & Foil Gun


R-CFS+KERII	07	52
DRILL ADAPTER	50	51

TORX 25 Screwdriver Bits


5	T-RI	T-TO	RX25	13	
1	וטו	1-10	IVVED	12	

We are PRAWLPLUG®

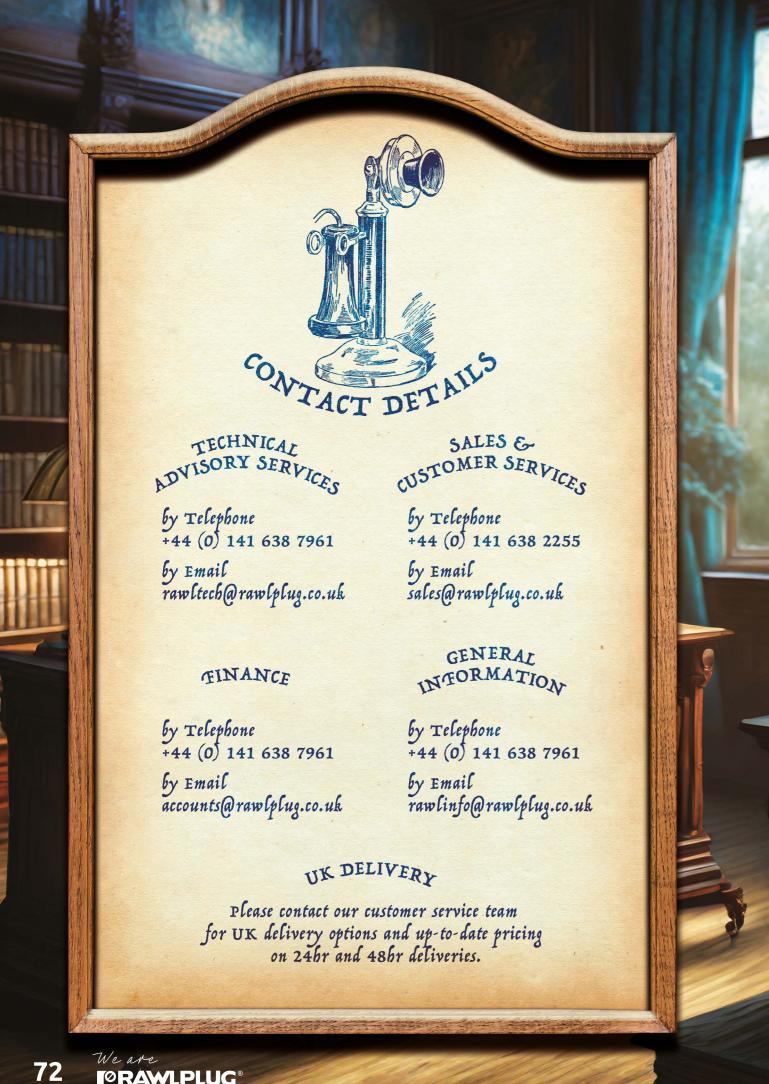



S		
	,	

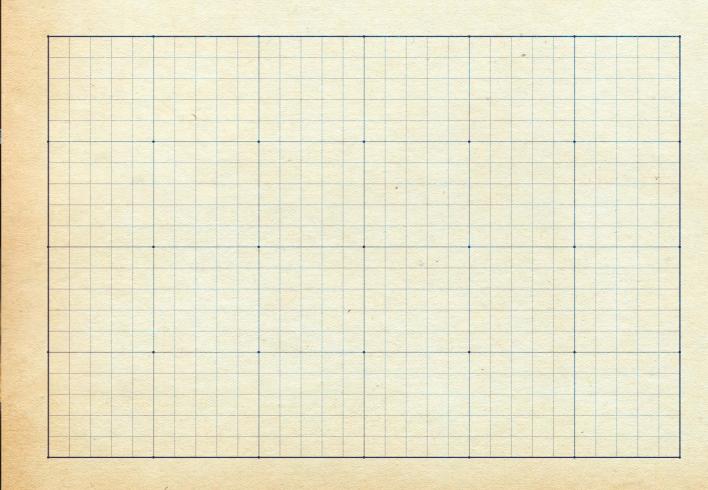

TERMS & CONDITIONS OF SALE

In these conditions "Rawlplug" shall mean Rawlplug Limited; "the Goods" shall mean the products supplied or to be supplied by Rawlplug under any Contract; "the Customer" shall mean the company firm or person buying the Goods from Rawlplug under any Contract and "Contract" shall mean a contract between Rawlplug and the Customer for the sale and purchase

2. APPLICATION OF CONDITIONS

All Goods supplied by Rawlplug are supplied on the following terms and conditions and no variation of those terms and conditions shall have effect unless expressly accepted by a Director of Rawlplug in writing. Rawlplug's conditions exclude any other terms and conditions which the Customer may seek to impose whether or not the Customer's conditions are contained in any other acceptance or counter offer made by the Customer.

All quotations given by Rawlplug are subject to acceptance by Rawlplug on receipt of the Customer's order. A Contract will only be formed when Rawlplug has accepted the Custo-

All descriptions specifications drawings and particulars of weights and dimensions submit-ted by Rawlplug or otherwise contained in Rawlplug's price list or other published matter are provided by Rawlplug in the belief that they are as accurate as reasonably possible but none of these shall form part of any Contract, shall not constitute a description of the Goods or be taken to be representations made by Rawlplug and are not warranted to be accurate.

5. PRICE

All prices quoted are Rawlplug's current prices at the time of delivery and are exclusive of VAT unless otherwise stated. The price payable for the Goods shall be the price ruling at the date of despatch and Rawlplug shall be entitled to adjust the price of the Goods at any time between the date of the order and the date of delivery of the Goods to take account of any increase in costs incurred by Rawlplug.

6.1 Delivery shall be deemed to have been effected:
6.1 Delivery shall be deemed to have been effected:
6.1.1 Where the Goods are carried in a vehicle owned by Rawlplug or in a vehicle owned by a carrier employed by Rawlplug when the vehicle is stationary as near to the point of delivery designated by the Customer as it can reasonably get and the delivery note is tendered to the Customer or the recipient of the Goods where delivery is not directly to the Customer.

6.1.2 In all other cases when the Goods leave Rawlplug's premises.
6.2 Time for delivery is not of the essence and Rawlplug shall not be liable for any loss or dama-

ge caused by late delivery or by non-delivery.

6.3 Rawlplug shall be entitled to make delivery by instalments and to invoice separately for each instalment. Where delivery is made by instalment each instalment shall be construed as the subject of a separate agreement to which all the provisions of these conditions shall (with

any necessary alterations) apply.

6.4 Where Rawlplug has agreed to deferred delivery such delivery shall be accepted by the Customer within six months from the date of the order. If the Customer fails to take delivery within such a period the risk shall pass to the Customer and the balance remaining undelivered together with storage costs shall be invoiced to the Customer and payment shall become

Immediately due.

6.5 Goods which the customer agrees to collect ex works must be collected within seven days of Rawlplug notifying the Customer that the Goods are ready. If the Goods are not collected within this period Rawlplug shall be entitled to invoice the Customer for the Goods and to charge for storage of the Goods the Goods being held at the Customer's risk.

6.6 Deviations in quantity of the Goods delivered from those stated on the Contract shall not give the Customer the right to repudiate the Contract to reject the Goods (save insofar as they materially exceed the amount ordered) or to claim damages for breach of Contract and the Customer shall be obliged to accept and pay at the Contract rate for the quantity delivered

(except insofar as the Customer has the right to reject the Goods under this condition).

6.7 The Customer shall ensure that the point of delivery designated by the Customer and all access routes to it are reasonably accessible for motor transport and shall also take such further steps as are reasonably necessary to facilitate delivery by Rawlplug at such point of delivery.

7.1 The price of the Goods (less any discount to which Customer is entitled) shall be due and payable on the last day of the month following that in which the invoice is dated. The time of payment of the price of the Goods shall be of the essence of the Contract.

7.2 If the Customer fails to make payment in respect of any invoice on the due date;

7.2.1 All invoices for Goods delivered for which payment has not been received shall become immediately due and payable not withstanding clause 7.1 or any previous agreement to the

7.2.2 Without prejudice to any other right or remedy available to Rawlplug, Rawlplug shall be

7.3.1 Charge the Customer interest (both before and after judgement) on the amount unpaid at the rate of 2% above the U.K. Clearing Bank base lending rate from time to time, until actual payment on all overdue accounts.

7.3.2.2 cancel the Contract or suspend any further deliveries to the Customer.
7.4 Rawlplug reserves the right at any time to demand security for payment before continuing with or delivering any order 8. RISK AND PROPERTY

8.1 Risk in the Goods shall pass to the Customer when the Goods are delivered or collected by

8.2 Notwithstanding delivery and the passing of risk in the Goods the Goods shall remain the property of Rawlplug until the Customer has paid the full price for the goods and all other sums owing from it to Rawlplug under any Contract together with any interest payable under any Contract in respect of the Goods.

8.3 Until title to the Goods passes to the Customer the Customer shall hold the Goods as

fiduciary agent and bailee for Rawlplug and shall keep the Goods in good and substantial repair and condition properly stored protected and insured and the Goods shall be

stored in such a way as to be clearly identifiable as belonging to Rawlplug. 8.4 Until such time as the title in the Goods passes to the Customer (and provided the Goods are still in existence and have not been re-sold) Rawlplug shall be entitled at any time to require the Customer to deliver up the Goods to Rawlplug and if the Customer fails to do so forthwith to enter upon any premises of the Customer or any third Party where the Goods are stored and repossess the Goods.

8.5 Rawlplug shall at any time be entitled to appropriate any payment made by the Customer in respect of any Goods in settlement of such invoices as Rawlplug may in its absolute discretion think fit notwithstanding any purported appropriation by the Customer.

9. INSPECTION • SHORT AGES

9.1 The Customer shall inspect the Goods on delivery or on collection as the case may be.

9.2 Rawlplug shall be under no liability for any defects or shortages that would be apparent on careful inspection if the terms of this Clause are not complied with and in any event will be under no liability if a written complaint is not delivered to Rawlplug within seven days of

delivery detailing the alleged defect or shortage. 9.3 In all cases where the Customer complains of defects or shortages Rawlplug shall without prejudice to the question of liability generally be under no liability in any event if it has not been given an opportunity to inspect the Goods before they had been used by the Customer. 9.4 Proof of delivery is available from the customer services department for a period of 28 days from the date of invoice. If a proof of delivery is requested more than 28 days after the date of the invoice or requested again Rawlplug Ltd shall be under no obligation to provide such proof and if the company decides to provide such proof of delivery it shall charge and administration fee of £5

CARRIAGE CHARGES

10. WARRANTY

10.1 Rawlplug warrants that it has title to and the right to sell the Goods.

10.2 No representation or warranty is given by Rawlplug as to the suitability or fitness of the Goods for any or any particular purpose and the Customer shall satisfy himself in this respect and shall be totally responsible therefore.

11. LIABILITY EXCLUSIONS

11.1 Each of the sub-clauses in this clause are to be treated as separate and independent.
11.2 Nothing in these conditions shall exclude or restrict Rawlplug's liability for death or personal injury caused by the negligence of Rawlplug.

11.3 Rawlplug is willing to undertake liability additional to that provided by this clause 11 in

xchange for a higher price for the Goods.

11.4 Rawlplug will either repair the Goods at its own expense or at its option replace the Goods if any defects which Rawlplug is reasonably satisfied are caused by faulty design manufacture materials or workmanship which are discovered within three months from the date of despatch provided that Rawlplug shall not be liable for defects caused by abnormal use misuse or neglect or use other than in accordance with any applicable Rawlplug technical instructions or similar literature and provided further that the Customer informs Rawlplug of the relevant defect in writing within seven days of delivery (or where the defect was not apparent on reaso

unable inspection) within seven days of discovering it. 11.5 Other than the terms set out in these conditions no other terms conditions or warranties

expressed or implied statutory or otherwise shall form part of the Contract. 11.6 Rawlplug shall not be liable for any direct or indirect loss or damage, loss of profit, loss of goodwill or loss of business opportunity suffered by the Customer or any damage to property of the Customer or anyone else whatsoever howsoever arising and whether or not caused by

11.7 In the event that notwithstanding the foregoing provisions of this clause Rawlplug is found liable for any loss or damage suffered by the Customer then Rawlplug's total liability for any one claim or for the total of all claims arising from any one act or default of Rawlplug (whether arising from Rawlplug's negligence or otherwise) shall not in any event exceed th

If the Customer being a company shall pass a resolution or suffer an order of a court to be made for its winding up or goes into liquidation (otherwise than for the purposes of amalgamation to an administration order or an encumbrancer takes possession or a receiver or administrati ve receiver is appointed of any of the assets or property of the Customer or being an individual or partnership shall suspend payment or propose to enter into any composition with creditors or becomes bankrupt or in either case becomes unable to pay its debts (or have no reasonable $prospect\ of\ so\ doing)\ or\ threatens\ to\ cease\ to\ carry\ on\ business\ then\ without\ prejudice\ to\ any$ other right or remedy available to Rawlplug, Rawlplug shall be entitled to treat the Contract as repudiated or suspend any further deliveries or recover the possession of any Goods for which payment in full has not been received without liability to the Customer and if Goods have been delivered but not paid for the price of those Goods shall become immediately due and payable ing any previous agreement or arrangement to the contrary.

In no circumstances will Rawlplug sell its Goods by sample and the supply of sample Goods to Customers or prospective Customers is not intended to provide them with a contractual specification of the Goods or to constitute a sale or offer of sale by sample.

Rawlplug gives notice to the Customer that information and product literature is available concerning the conditions necessary to ensure that the Goods supplied against the Contract will be safe and without risk to health when used handled processed stored or transported by a person at work. The Customer should immediately contact Rawlplug if he is not in possession

15. ASSIGNMENT

The Customer shall not assign or transfer or purport to assign and transfer any Contract to which these conditions apply or the benefit thereof to any other person whatsoever

Rawlplug shall not be liable for any failure to deliver the Goods arising from circumstances outside Rawlplug's control including for example acts of god, war, riot, explosion, abnormal weather, fire, flood, strikes, lock outs, Government action or Regulations (UK or otherwise) delays by suppliers, accidents and shortages of materials, labour or manufacturing facilities.

No cancellation by the Customer is permitted unless expressly agreed by a Director of Raw-plug in writing. In the event of cancellation, the Customer will indemnify Rawlplug fully inst all expenses incurred by Rawlplug together with liquidated damages of 20% of the Contract price

Please add the following (reduce text size on page if required to fit): 18. RETURNS

The Customer must obtain an authorisation number issued by Rawlplug prior to returning any Goods. All Goods to be returned must be consigned carriage paid to Rawlplug's warehouse at Skibo Drive, Thornliebank Industrial Estate, Glasgow G46 8JR. All returns will be subject to a handling charge amounting 20%. Goods can only be accepted for return if upon examination they are found to be in the same condition in all respects as upon delivery. Goods with a defi ned shelf life will only be accepted for return for credit or replacement if a minimum of three nonths shelf-life remains.

NO return of Chemical based products which include Resins, Foams, Silicones & Gas fuel cells, in accordance with the Rawlplug Quality Assurance Policies is accepted unless there is a proven manufacturing fault. The customer should follow local government guidelines in dispo sing of any of our un-used chemical products.

lowever should there be a potential fault in the product, please ensure that Rawlplug Custo mer Service is notified, who in turn will action and inform Rawlplug's internal departments g, Technical etc) for testing to confirm if a manufacturing error has taken place. 19. NOTICES Any notices to be given hereunder shall be in writing and shall be deemed to have been duly

given if sent or delivered to Rawlplug at its address (given below) or such other address as that party may from time to time notify in writing and shall be deemed to have been served and

No waiver by Rawlplug of any breach of the Contract by the Customer shall be considered as a waiver of any subsequent breach of the same or any other provision.

All contracts between Rawlplug and the Customer shall be governed and construed in accordance with English law and all disputes arising in relation to such Contracts shall be submitted to the jurisdiction of the English courts save that Rawlplug retain the right to take proceedings in any other court of competent jurisdiction.

Headings in these conditions are for each of reference only and do not form part of the conons and shall not be deemed to alter or affect the meaning of any of the conditions

Rawlplug Ltd, Skibo Drive, Thornliebank Industrial Estate, Glasgow G46 8JR

DELTA SPIRAL NYLON PLUGS

For strong fixings in lightweight building blocks

This tough nylon plug is ideal for making strong, safe fixing masonry, and is particularly efficient in modern lightweight although test results in brickwork and concrete are satisfactor Its positive grip is obtained from the all-round expansion a

the plug, which is made possible by the spiral slots that run way along the plug from the tip. Special external form cov ference to enhance the plug's gripping powers.


Projecting from the sides of the plugs are angled fins design rotation in soft masonry, but not to impede plug entry in hard mast Several screw sizes are accepted by each size of Delta plug, and intert

Webs keep the smaller screw sizes in the plug's centre, preventing the screw from running out at the side. Accurate screw entry is assured by the good lead-in, which also allows the plain shank of a screw to be accepted - thus very lead-in, which also allows the plain shank of a screw to be accepted — thus very thin items can easily be fixed without damage to wall surface. The Delta plug the plug is made is stronger than other plastics, and is also more stable at high temperatures.



THE RAWLPLUG COMPANY LIMITED



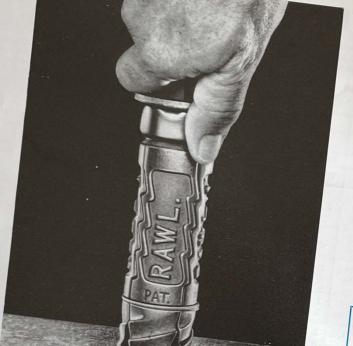

RAWLBOLTS

NORMAL LOAD CAPACITY OF RAWLBOLTS

As the test results show, properly fitted Rawlbolts will withstand greater loads than the bolts, or masonry, can hold, and therefore they can be used with complete confidence to carry the full load capacity of the fixing bolt.

Unfortunately, masonry strength varies over a very wide range and is often the weakest part of a fixing. Therefore we recommend using a Safety Factor Unfortunately, masonry strength varies over a very wide range and is often the weakest part of a fixing. Therefore we recommend using a Safety Factor when choosing fixing sizes for given loads.

Our experience has shown that for a Constant Steady Load a factor of 5:1 is sufficient to cover most variations in masonry strength. But where there is increasing the safety factor to 10:1. This is normal practice for constructional

The Table below shows our recommended loading for standard Rawlbolts fitted in the correct manner in good quality masonry.

Because bolts are not so strong in Shear as they are in Tension, it is accepted practice for bolts supporting a Shear load to be permitted to carry up to 75% of the load the same bolt would carry in Tension.

Nominal Size of Bolt	Code Letter		Tensile Loads				Tensile Loads		
ins.			Steady	oale	Shock	Sai	She Steady	ear Loads	
3	A	1bs. 280	kilos	lbs.	kilos	lbs.	Load	Safe Shock Load	
1/4		200	127	140	63.5	210	05	lbs. kilos	

Weare

JSTRY

DESIGNO years of expertise

CALL +44(0) 141 6387 961

EMAIL

sales@rawlplug.co.uk

VISIT

www.rawlplug.co.uk

Rawlplug Ltd

Skibo Drive Thornliebank Industrial Estate Glasgow G46 8JR

SEARCH RAWLPLUG











We are

IORAWLPLUG®